



Type 2063 can be combined with...

**Type 8697**

Feedback

**Type 8640/8644**

Valve island

Pneumatically operated 2/2 way dia-phragm valve with stainless steel actuator

- Flow optimized and deadleg free stainless steel cast or forged bodies
- Media separation with different diaphragm materials
- Trusted inner parts for long cycle life
- Actuator in stainless steel for demanding environments
- Large accessory program with stroke limitation and feedback

**Type 6012/6014 P**

Pilot valve

**Stroke limiter**

The pneumatically operated diaphragm valve with stainless steel actuators fulfils the demands of tough process environments. Forged or casted bodies in high quality stainless steel have excellent cleanability and surface qualities that are required in pharma, biopharma, cosmetic or food and beverage industry.

The stainless steel actuator is designed to withstand tough process environments. Laser welding allows a design without seals and smooth surfaces that is both cleanable and robust. With a ducted exhaust air port the actuator can be isolated from the environment an optimum from a lifetime and hygienic point of view.

The trusted diaphragm materials are optimized for a long cycle life and comply to USP Class IV, FDA and EC-Regulation 1935/2004.

Placed within the Burkert diaphragm valve program various port connections, and a large accessory program are available, also explosion proof variants.

Technical data	
Port connection	DN15 to 50
Body material	Forged stainless steel 316L/1.4435/BN2 Cast stainless steel 316L /1.4435
Port connections	EN ISO 1127/ISO 4200, DIN 11866 RB, DIN 11850 R2, DIN 11866 RA, DIN EN 10357 RB, ASME BPE, DIN 11866 RC on request: SMS 3008, BS 4825 on request
Actuator material	1.4404 (316L) 1.4308
Diaphragm materials	EPDM (AB), PTFE/EPDM (EA) EPDM (AD), advanced PTFE/EPDM (EU), GYLON®/EPDM laminated (ER) on request
Medium	Neutral gases and liquids, high purity, sterile, aggressive or abrasive fluids
Viscosity	up to viscous
Surface finishes - forged version	(average surface finish) Ra ≤ 0.5 µm (ASME BPE SF1) on request Ra ≤ 0.38 µm (ASME BPE SF4)
Surface finishes - cast version	(average surface finish) Ra ≤ 0.76 µm (ASME BPE SF3) Ra ≤ 0.6 µm (ASME BPE SF6) on request

Content

Valve specifications	System spec. On/Off	Request for quotation
Type 2063 On/Off	Type 8801-DV	Type 8801-DF p.13-15
Technical data & ordering info.	Technical data & ordering info.	p.10-14
Forged version		
Cast version		
Dimensions		


Technical data, continued

Technical data, continued	
Medium temperature	EPDM (AB), PTFE/EPDM (EA), EPDM (AD), advanced PTFE/EPDM (EU) GYLON®/EPDM laminated (ER)
Ambient temperature	-10 to +130°C (steam sterilisation +140°C for 60 min) -5 to +143°C (steam sterilisation +150°C for 60 min) -5 to +130°C (steam sterilisation +140°C for 60 min)
Control medium	Neutral gases, air
Max. pilot pressure	max. 10.5 bar* * with actuator size 130mm (P) max. 7.5 bar
Pilot air ports	Thread G1/8
Installation	as required, preferably with actuator in upright position

Technical data valves**Pressure values**

Diaphragm size	Actuator size Ø [mm]	Permitted pilot pressure [bar]		Max. operating pressure [bar] for seal material	
		min.	max.	EPDM	PTFE/EPDM advanced PTFE/EPDM, GYLON®/EPDM laminated
15	50 (D)	5	10.5	8.5	5
	70 (M)			10	10
20	70 (M)	5	10.5	10	10
	90 (N)	5.5	10.5	6.5	6
25	70 (M)	5	10.5	10	8
	90 (N)	5.5	10.5	10	10
40	90 (N)	5.5	10.5	10	10
	130 (P)	5	7.5		
50	130 (P)	5	7.5	8	7

Pressure valves [bar]: Overpressure to the atmospheric pressure

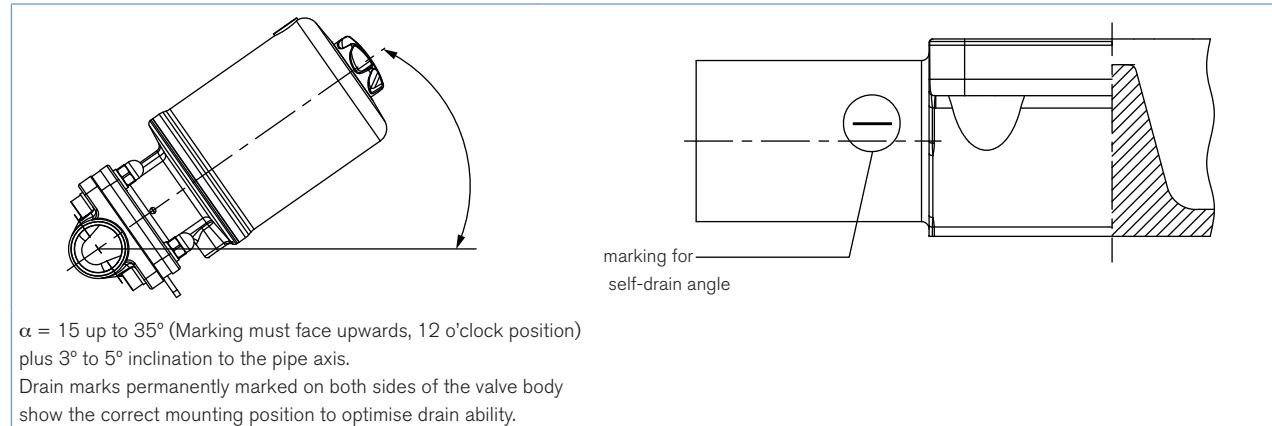Installation for self-draining operation

Approvals

Suitability for foodstuffs / sterile applications





- The composition of the EPDM (AB), EPDM (AD), PTFE/EPDM (EA), advanced PTFE (EU) and GYLON®/EPDM laminated (ER) diaphragms corresponds to the Code of Federal Regulations, published by the FDA (Food and Drug Administration, USA).



- The composition of the EPDM (AB), EPDM (AD), PTFE/EPDM (EA), advanced PTFE (EU) and GYLON®/EPDM laminated (ER) diaphragms is suitable for the application with food and beverage (acc. to EC-Regulation 1935/2004/EC)
- The composition of the EPDM (AB), EPDM (AD), PTFE/EPDM (EA), advanced PTFE (EU) and GYLON®/EPDM laminated (ER) diaphragms are approved acc. USP Class VI.

Materials Type 2063 Diaphragm valve

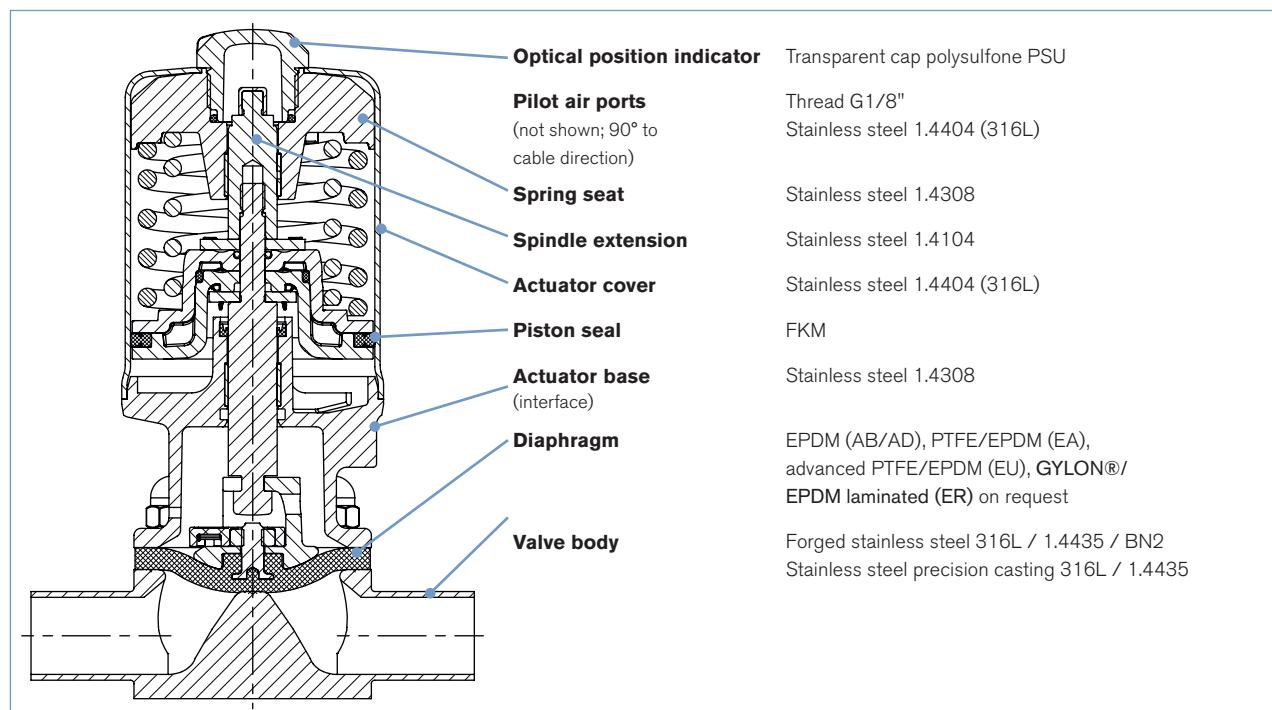

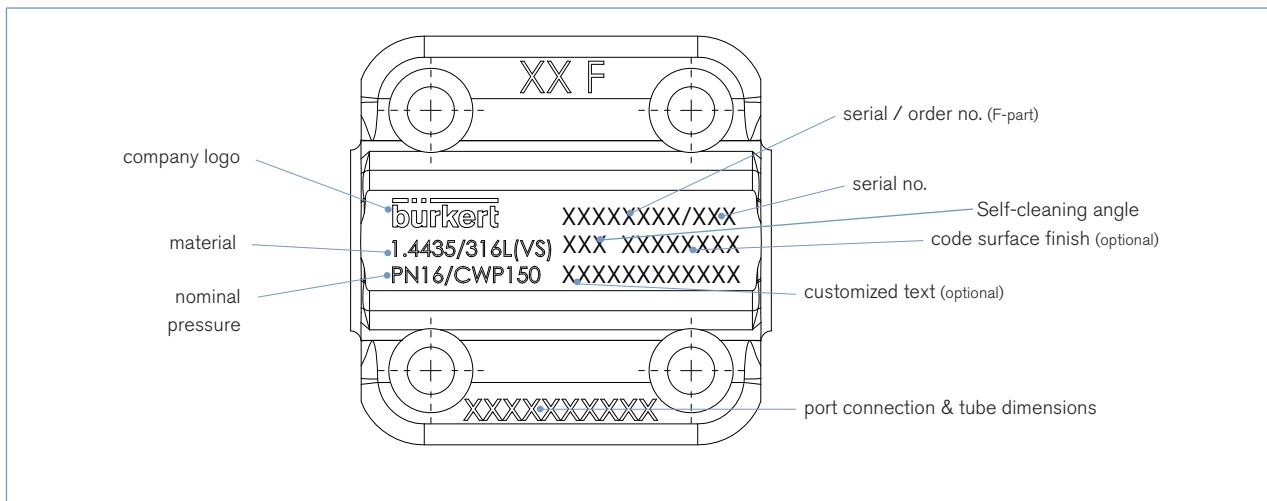
Forged**Body label****Kv-values forged body**

Diaphragm size	Port connection DN		Kv-value forged [m³/h]		
	[mm]	[inch]	DIN EN ISO 1127 ISO 4200 DIN 11866 RB	DIN 11850 R2 DIN 11866 RA DIN EN 10357 RA	ASME BPE DIN11866 RC
15	15	1/2"	6.5	6.5	3.1
20	20	3/4"	12.5	12.4	8.4
25	25	1"	18	20	15.5
40	40	1 1/2"	41	40	37
50	50	2"	66	66	66

Flow rate: Kv value forged [m³/h] for elastomer membranes: Measured at +20°C, 1 bar pressure at valve inlet and free outlet.

Ordering chart Type 2063 forged diaphragm valve

Forged body with welded connection, surface finish electro polished, Ra ≤ 0.38 µm (ASME BPE SF4), and inspection 3.1 acc. to EN-ISO 10204, further on request

Control function	Orifice		Diaphragm size	Port connection tube Ø x wall thickness [mm]	Kv-value water [m³/h]	Actuator size ø [mm]	Pilot pressure [bar]	Max. operating pressure [bar]	Item no. mechanical polished, Ra ≤ 0.38 µm, incl. 3.1 certificat							
	[mm]	[inch]														
A		Acc. to EN ISO 1127/ISO 4200/DIN 11866 series B														
Diaphragm material EPDM (AD)																
2/2 way valve, externally controlled, normally closed by spring operation with pilot valve (NC) 	15	1/2"	15	21.3 x 1.6	6.5	50 (D) 70 (M)	5-10.5 5-10.5	8.5 10	285 310 285 311							
	20	3/4"	20	26.9 x 1.6	12.5	70 (M)	5-10.5	10	285 312							
	25	1"	25	33.7 x 2.0	18	70 (M) 90 (N)	5-10.5 5.5-10.5	6.5 10	285 313 285 314							
	40	1 1/2"	40	48.3 x 2.0	41	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 315 285 316							
	50	2"	50	60.3 x 2.0	66	130 (P)	5-7.5	8	285 317							
	Diaphragm material PTFE/EPDM (EU)															
	15	1/2"	15	21.3 x 1.6	6.5	50 (D) 70 (M)	5-10.5 5-10.5	5 10	285 335 285 336							
	20	3/4"	20	26.9 x 1.6	12.5	70 (M)	5-10.5	10	285 337							
	25	1"	25	33.7 x 2.0	18	70 (M) 90 (N)	5-10.5 5.5-10.5	6 8	282 091 285 338							
	40	1 1/2"	40	48.3 x 2.0	41	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 339 285 340							
	50	2"	50	60.3 x 2.0	66	130 (P)	5-7.5	7	285 341							
	Acc. to DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series B															
	Diaphragm material EPDM (AD)															
	15	1/2"	15	19.0 x 1.5	6.5	50 (D) 70 (M)	5-10.5 5-10.5	8.5 10	285 301 285 302							
	20	3/4"	20	23.0 x 1.5	12.4	70 (M)	5-10.5	10	285 304							
	25	1"	25	29.0 x 1.5	20	70 (M) 90 (N)	5-10.5 5.5-10.5	6.5 10	285 305 285 306							
	40	1 1/2"	40	41.0 x 1.5	40	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 307 285 308							
	50	2"	50	53.0 x 1.5	66	130 (P)	5-7.5	8	285 309							
	Diaphragm material PTFE/EPDM (EU)															
	15	1/2"	15	19.0 x 1.5	6.5	50 (D) 70 (M)	5-10.5 5-10.5	5 10	285 326 285 327							
	20	3/4"	20	23.0 x 1.5	12.4	70 (M)	5-10.5	10	285 328							
	25	1"	25	29.0 x 1.5	20	70 (M) 90 (N)	5-10.5 5.5-10.5	6 8	285 329 285 330							
	40	1 1/2"	40	41.0 x 1.5	40	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 331 285 333							
	50	2"	50	53.0 x 1.5	66	130 (P)	5-7.5	7	285 334							

**Further versions on request**

Diaphragm EPDM (AB), advanced PTFE/EPDM (EU), GYLON®/EPDM laminated (ER)



Clamp acc. to SMS3008; Tri-Clamps acc. to ASME BPE, DIN 32676 series A, ISO 2852 / SMS 3017; others on request



B (normally closed by spring action) / I (double acting)



Surface finishes, mechanical polished Ra ≤ 0.5 µm (ASME BPE SF5)
Versions with reduced spring force for higher membrane life

Ordering chart Type 2063 forged diaphragm valve, continued

Forged body with welded connection, surface finish electro polished, Ra ≤ 0.38 µm (ASME BPE SF4), and inspection 3.1 acc. to EN-ISO 10204, further on request

Control function	Orifice		Diaphragm size	Port connection tube Ø x wall thickness [mm]	Kv-value water [m³/h]	Actuator size ø [mm]	Pilot pressure [bar]	Max. operating pressure [bar]	Item no. mechanical polished, Ra ≤ 0.38 µm, incl. 3.1 certificat							
	[mm]	[inch]														
A		Acc. to ASME BPE/DIN 11866 series C														
Diaphragm material EPDM (AD)																
2/2 way valve, externally controlled, normally closed by spring operation with pilot valve (NC) ↓ 	15	1/2"	15	12.7 x 1.65	3.1	50 (D) 70 (M)	5-10.5 5-10.5	8.5 10	285 292 285 294							
	20	3/4"	20	19.05 x 1.65	8.4	70 (M)	5-10.5	10	285 295							
	25	1"	25	25.4 x 1.65	15.5	70 (M) 90 (N)	5-10.5 5.5-10.5	6.5 10	285 296 285 297							
	40	1 1/2"	40	38.1 x 1.65	37	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 298 285 299							
	50	2"	50	50.8 x 1.65	66	130 (P)	5-7.5	8	285 300							
Diaphragm material PTFE/EPDM (EU)																
	15	1/2"	15	12.7 x 1.65	3.1	50 (D) 70 (M)	5-10.5 5-10.5	5 10	285 318 285 319							
	20	3/4"	20	19.05 x 1.65	8.4	70 (M)	5-10.5	10	285 320							
	25	1"	25	25.4 x 1.65	15.5	70 (M) 90 (N)	5-10.5 5.5-10.5	6 8	285 321 285 322							
	40	1 1/2"	40	38.1 x 1.65	37	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 323 285 324							
	50	2"	50	50.8 x 1.65	66	130 (P)	5-7.5	7	285 325							

i Further versions on request



Material
Diaphragm EPDM (AB), advanced PTFE/EPDM (EU), GYLON®/EPDM laminated (ER)



Port connection
Clamp acc. to SMS3008; Tri-Clamps acc. to ASME BPE, DIN 32676 series A, ISO 2852 / SMS 3017; others on request



Control function
B (normally closed by spring action) / I (double acting)



Additional
Surface finishes, mechanical polished Ra ≤ 0.5 µm (ASME BPE SF5)
Versions with reduced spring force for higher membrane life

Cast

Kv-value cast body

Diaphragm size	Actuator size DN		Kv-value [m³/h]
	[mm]	[inch]	
15	15	1/2"	5.5
20	20	3/4"	10
25	25	1"	14
40	40	1 1/2"	30
50	50	2"	51.5

Flow rate: Kv value forged [m³/h] for elastomer membranes: Measured at +20°C, 1 bar pressure at valve inlet and free outlet.

Ordering chart Type 2063 cast version

Cast body with welded connection, surface finish mechanical polished, Ra <= 0.8 µm, others on request

Control function	Orifice		Diaphragm size	Port connection tube Ø x wall thickness [mm]	Kv-value water [m³/h]	Actuator size Ø [mm]	Pilot pressure [bar]	Max. operating pressure [bar]	Item no. mechanical polished, Ra <= 0.8 µm							
	[mm]	[inch]														
A																
Acc. to EN ISO 1127/ISO 4200/DIN 11866 series B																
Diaphragm material EPDM (AD)																
2/2 way valve, externally controlled, normally closed by spring operation with pilot valve (NC) 	15	1/2"	15	21.3 x 1.6	5.5	50 (D) 70 (M)	5-10.5 5-10.5	8.5 10	285 259 285 260							
	20	3/4"	20	26.9 x 1.6	10.0	70 (M)	5-10.5	10	285 262							
	25	1"	25	33.7 x 2.0	14.0	70 (M) 90 (N)	5-10.5 5.5-10.5	6.5 10	285 263 285 264							
	40	1 1/2"	40	48.3 x 2.0	30.0	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 267 285 268							
	50	2"	50	60.3 x 2.0	51.5	130 (P)	5-7.5	8	285 269							
Diaphragm material PTFE/EPDM (EA)																
	15	1/2"	15	21.3 x 1.6	5.5	50 (D) 70 (M)	5-10.5 5-10.5	5 10	285 284 285 285							
	20	3/4"	20	26.9 x 1.6	10.0	70 (M)	5-10.5	10	285 286							
	25	1"	25	33.7 x 2.0	14.0	70 (M) 90 (N)	5-10.5 5.5-10.5	6 8	285 287 285 288							
	40	1 1/2"	40	48.3 x 2.0	30.0	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 289 285 290							
	50	2"	50	60.3 x 2.0	51.5	130 (P)	5-7.5	7	285 291							
Acc. to DIN 11850 series 2/DIN 11866 series A/DIN EN 10357 series B																
Diaphragm material EPDM (AD)																
	15	1/2"	15	19.0 x 1.5	5.5	50 (D) 70 (M)	5-10.5 5-10.5	8.5 10	285 250 285 252							
	20	3/4"	20	23.0 x 1.5	10.0	70 (M)	5-10.5	10	285 253							
	25	1"	25	29.0 x 1.5	14.0	70 (M) 90 (N)	5-10.5 5.5-10.5	6.5 10	285 254 285 255							
	40	1 1/2"	40	41.0 x 1.5	30.0	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 256 285 257							
	50	2"	50	53.0 x 1.5	51.5	130 (P)	5-7.5	8	285 258							
Diaphragm material PTFE/EPDM (EA)																
	15	1/2"	15	19.0 x 1.5	5.5	50 (D) 70 (M)	5-10.5 5-10.5	5 10	285 276 285 277							
	20	3/4"	20	23.0 x 1.5	10.0	70 (M)	5-10.5	10	285 278							
	25	1"	25	29.0 x 1.5	14.0	70 (M) 90 (N)	5-10.5 5.5-10.5	6 8	285 279 285 280							
	40	1 1/2"	40	41.0 x 1.5	30.0	90 (N) 130 (P)	5.5-10.5 5-7.5	10 10	285 281 285 282							
	50	2"	50	53.0 x 1.5	51.5	130 (P)	5-7.5	7	285 283							

**Further versions on request**

Material Diaphragm EPDM (AB), advanced PTFE/EPDM (EU) and FKM (FF)



Port connection Clamp acc. to SMS3008; Tri-Clamps acc. to ASME BPE, DIN 32676 series A, ISO 2852 / SMS 3017; others on request



Control function B (normally closed by spring action) / I (double acting)



Additional Surface finishes electro polished Ra ≤ 0.6 µm (ASME BPE SF6)

Ordering chart Type 2063 cast version

Cast body with welded connection, surface finish mechanical polished, Ra <= 0.8 µm, others on request

Control function	Orifice		Diaphragm size	Port connection tube Ø x wall thickness [mm]	Kv-value water [m³/h]	Actuator size ø [mm]	Pilot pressure [bar]	Max. operating pressure [bar]	Item no. mechanical polished, Ra <= 0.8 µm							
	[mm]	[inch]														
A																
2/2 way valve, externally controlled, normally closed by spring operation with pilot valve (NC)																
	Acc. to ASME BPE/DIN 11866 series C															
	Diaphragm material EPDM (AD)															
	20	3/4"	20	19.05 x 1.65	10.0	70 (M)	5-10.5	10	285 243							
	25	1"	25	25.4 x 1.65	14.0	70 (M)	5-10.5	6.5	285 244							
						90 (N)	5.5-10.5	10	285 246							
	40	1 1/2"	40	38.1 x 1.65	30.0	90 (N)	5.5-10.5	10	285 247							
						130 (P)	5-7.5	10	285 248							
	50	2"	50	50.8 x 1.65	51.5	130 (P)	5-7.5	8	285 249							
	Diaphragm material PTFE/EPDM (EA)															
	20	3/4"	20	19.05 x 1.65	10.0	70 (M)	5-10.5	10	285 270							
	25	1"	25	25.4 x 1.65	14.0	70 (M)	5-10.5	6	285 271							
						90 (N)	5.5-10.5	8	285 272							
	40	1 1/2"	40	38.1 x 1.65	30.0	90 (N)	5.5-10.5	10	285 273							
	50	2"	50	50.8 x 1.65	51.5	130 (P)	5-7.5	10	285 274							
						130 (P)	5-7.5	7	285 275							

i Further versions on request**Material**

Diaphragm EPDM (AB), advanced PTFE/EPDM (EU), GYLONR/EPDM laminated (ER)

Port connection

Clamp acc. to SMS3008; Tri-Clamps acc. to ASME BPE, DIN 32676 series A, ISO 2852 / SMS 3017; others on request

Control function


B (normally closed by spring action) / I (double acting)

Additional

Surface finishes electro polished Ra ≤ 0.6 µm (ASME BPE SF6)

Dimensions Type 2063 forged and cast diaphragm valve [mm]

Forged

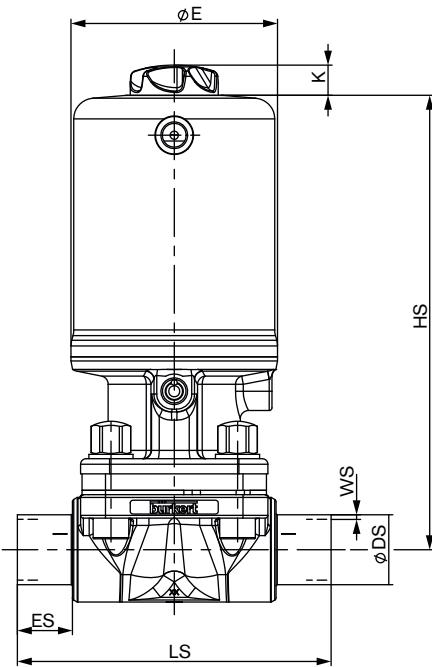


All bodies						acc. to EN ISO 1127/ISO 4200/ DIN 11866 series B				acc. to ASME BPE/DIN 11866 series C				
Orifice [mm]	Orifice [inch]	Diaphragm size	Actuator size	ØE [mm]	K [mm]	HS [mm]	LS [mm]	ES [mm]	ØDS [mm]	WS [mm]	LS [mm]	ES [mm]	ØDS [mm]	WS [mm]
15	1/2"	15	50 (D)	55	26.5	131	110	30.8	21.3	1.6	108	29.8	12.7	1.65
			70 (M)	75	26.5	139.4								
20	3/4"	20	70 (M)	75	26.5	154.3	119	29.6	26.9	1.6	117	28.3	19.05	1.65
25	1"	25	70 (M)	75	26.5	165.1	129	20	33.7	2	114	20	25.4	1.65
			90 (N)	96	29	187								
40	1 1/2"	40	90 (N)	96	29	206.5	161	20	48.3	2	159	34.5	38.1	1.65
			130 (P)	137	29	258.9								
50	2"	50	130 (P)	137	29	272.7	192	20	76.1	2.3	190	41	63.5	1.65

All bodies						acc. to DIN 11850 series 2/DIN 11866 series A/ DIN EN 10357 series B,				
Orifice [mm]	Orifice [inch]	Diaphragm size	Actuator size	ØE [mm]	K [mm]	HS [mm]	LS [mm]	ES [mm]	ØDS [mm]	WS [mm]
15	1/2"	15	50 (D)	55	26.5	131	110	30.8	19	1.5
			70 (M)	75	26.5	139.4				
20	3/4"	20	70 (M)	75	26.5	154.3	119	20	23	1.5
25	1"	25	70 (M)	75	26.5	165.1	129	20	29	1.5
			90 (N)	96	29	187				
40	1 1/2"	40	90 (N)	96	29	206.5	161	20	41	1.5
			130 (P)	137	29	258.9				
50	2"	50	130 (P)	137	29	272.7	192	42	70	2

Ordering information for valve system On/Off with stainless steel actuator Type 8801-DV

An On/Off valve system with stainless steel actuator, Type 8801-DV, consists of a diaphragm valve, Type 2063 and position feedback Type 8697 (see separate datasheets; 8801 DV with 8697 feedback function)

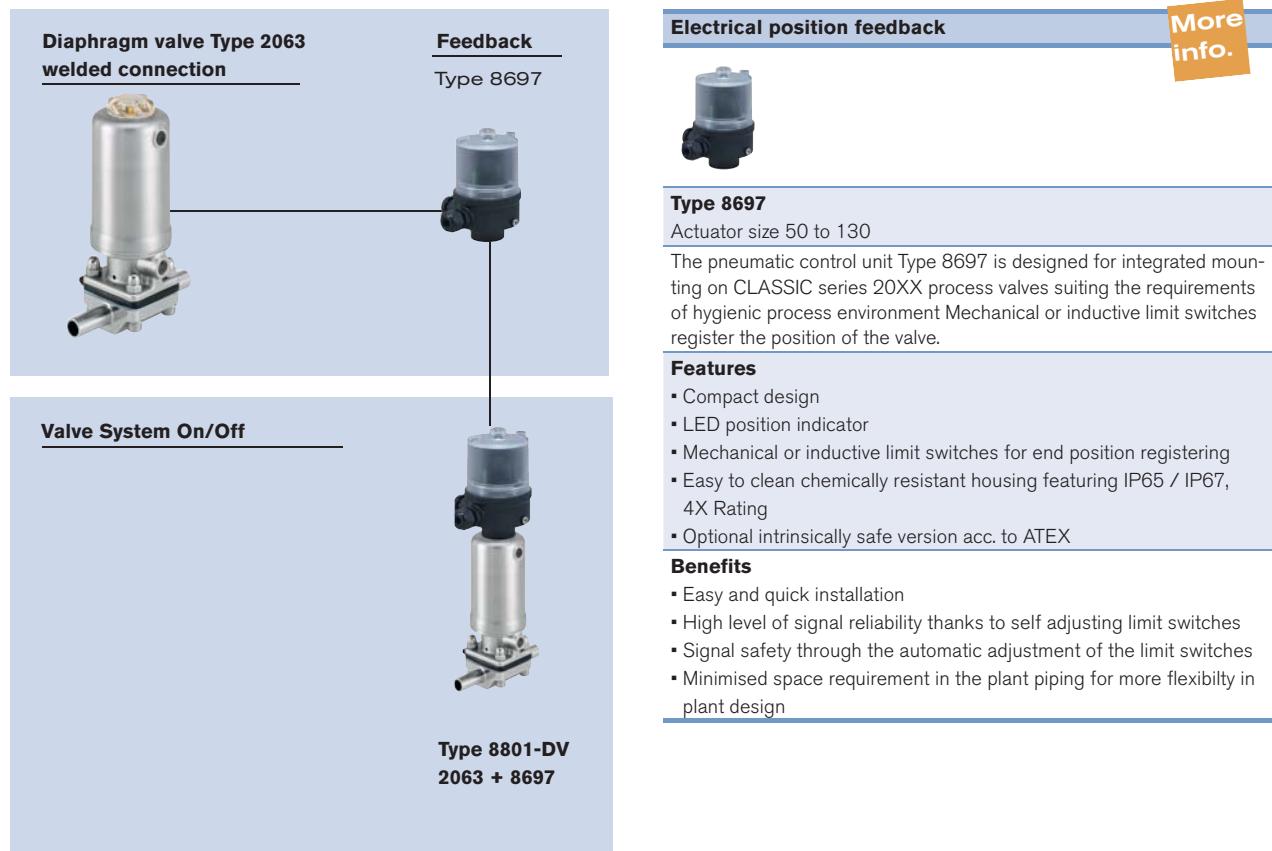

Ordering chart for accessories

Accessories has to be ordered separately

Accessory	for actuator size	Item no.
Stainless steel Silencer Set (VA-Silencer incl. PTFE sealing ring)	universal	696 931
Max. stroke limitation	D (Ø50), M (Ø70)	699 550
	N (Ø90), P (Ø130)	699 994
Min.-/Max. stroke limitation	D (Ø50), M (Ø70)	699 986
	N (Ø90), P (Ø130)	699 998
Proximity switch (single)	D (Ø50), M (Ø70)	699 989
	N (Ø90), P (Ø130)	699 991
Proximity switch (double)	D (Ø50), M (Ø70)	699 990
	N (Ø90), P (Ø130)	699 992
Adaptionset 8697*	D (Ø50), M (Ø70)	699 551
	N (Ø90), P (Ø130)	580 000
8697*	universal	depending on version

For further accessories see accessories datasheet Type 2XXX for the full options programme.

More info.

Valve features, specification key - Request for quotation

Example

2063	A	15	AB	VS	SA42	NO23
------	---	----	----	----	------	------

Specification key

(Please make a choice)

CONTROL FUNCTION

A	normally closed by spring action
B	normally open by spring action
I	double acting

ORIFICE [mm] (diaphragm)

08
10
15
20
25
32
40
50

SEAL MATERIAL

AB	EPDM
AD	EPDM
EA	PTFE/EPDM
ER	GYLON®/EPDM laminated
EU	advanced PTFE/EPDM in two pieces

BODY MATERIAL

VG	Stainless steel, cast 316L / 1.4435
VS	Forged stainless steel 316L/1.4435/BN2

VARIABLE CODES

Surfaces - forged design
NO14 Int. Mechanical polished Ra ≤ 0.5 µm (ASME BPE SF1)
NO17 Int. Electro polished Ra ≤ 0.38 µm (ASME BPE SF4)
Surfaces - cast version
NO06 Int. Mechanical polished Ra ≤ 0.76 µm (ASME BPE SF3)
NO16 Int. Electro polished Ra ≤ 0.6 µm (ASME BPE SF6)
EC04 Reduced spring force

Standard



DN [mm]	EN ISO 1127/ ISO 4200 DIN 11866 S. B	SMS 3008	Port connection weld end				BS4825	ASME BPE DIN 11866 S. C
			DIN 11850 S. 0	DIN 11850 R. 1	DIN 11850 S. 2 DIN 11866 S. A	DIN 11850 R. 3		
8	SA40 - 13.5x1.6		SC42 - 10.0x1.0				SODB - 6.35x1.2	SA90 - 6.35x0.89
10	SA41 - 17.2x1.6			SF40 - 12.0x1.0	SD40 - 13.0x1.5	SE40 - 14.0x2.0	SODC - 9.53x1.2	SA91 - 9.53x0.89
15	SA42 - 21.3x1.6	SA58 - 12.0x1.0	SC43 - 18.0x1.5	SF41 - 18.0x1.0	SD42 - 19.0x1.5	SE42 - 20.0x2.0	SODD - 12.7x1.2	SA92 - 12.7x1.65
20	SA43 - 26.9x1.6	SA59 - 18.0x1.0	SC44 - 22.0x1.5	SF42 - 22.0x1.0	SD43 - 23.0x1.5	SE43 - 24.0x2.0	SODE - 19.05x1.2	SA93 - 19.05x1.65
25	SA44 - 33.7x2.0	SA60 - 25.0x1.2	SC45 - 28.0x1.5	SF43 - 28.0x1.0	SD44 - 29.0x1.5	SE44 - 30.0x2.0	SODF - 25.4x1.65	
32	SA45 - 42.4x2.0	SA61 - 33.7x1.2	SC46 - 34.0x1.5	SF44 - 34.0x1.0	SD45 - 35.0x1.5	SE45 - 36.0x2.0		
40	SA46 - 48.3x2.0	SA62 - 38.0x1.2	SC47 - 40.0x1.5	SF45 - 40.0x1.0	SD46 - 41.0x1.5	SE46 - 42.0x2.0	SODH - 38.1x1.65	
50	SA47 - 60.3x2.0	SA63 - 51.0x1.2	SC48 - 52.0x1.5	SF46 - 52.0x1.0	SD47 - 53.0x1.5	SE47 - 54.0x2.0	SODI - 50.8x1.65	

DN [mm]	Clamp 34.0 like DIN 32676 S. B (ISO-tube (ISO4200))	DIN 32676 S. A (ISO-tube (DIN11850))	Port connection Clamp			ASME BPE	BS 4825 (Clamp BS 4825-3, tube BS 4825-1)
			DIN 32676 S. B (ISO-tube (ISO4200))	ASME BPE	BS 4825 (Clamp BS 4825-3, tube BS 4825-1)		
8	TC51 - 13.5x1.6 Cl: 34.0	TD40 - 10.0x1.0 Cl: 25.0	TC40 - 13.5x1.6 Cl: 25.0	TG50 - 6.35x0.89 Cl: 25.0			
10	TC41 - 17.2x1.6 Cl: 34.0	TD41 - 13.0x1.5 Cl: 34.0	TC53 - 17.2x1.6 Cl: 25.0	TG01 - 9.53x0.89 Cl: 25.0			
15	TC42 - 21.3x1.6 Cl: 34.0	TD42 - 19.0x1.5 Cl: 34.0	TC52 - 21.3x1.6 Cl: 50.5	TG02 - 12.7x1.65 Cl: 25.0	TH42 - 12.7x1.2 Cl: 25.0		
20		TD43 - 23.0x1.5 Cl: 34.0	TC43 - 26.9x1.6 Cl: 50.5	TG03 - 19.05x1.65 Cl: 25.0	TH43 - 19.05x1.2 Cl: 25.0		
25		TD44 - 29.0x1.5 Cl: 50.5	TC44 - 33.7x2.0 Cl: 50.5	TG04 - 25.4x1.65 Cl: 50.5			
32							
40		TD46 - 41.0x1.5 Cl: 50.5	TC46 - 48.3x2.0 Cl: 64.0	TG05 - 38.1x1.65 Cl: 50.5			
50		TD47 - 53.0x1.5 Cl: 64.0	TC47 - 60.3x2.0 Cl: 77.5	TG06 - 50.8x1.65 Cl: 64.0			

Note

You can fill out
the fields directl
in the PDF file
before printing
out the form.

Valve system On/Off with stainless steel actuator Type 8801-DV – request for quotation

► Please fill out and send to your nearest Bürkert facility* with your inquiry or order

Company	Contact person
Customer no.	Department
Address	Tel./Fax
Postcode/town	E-Mail

= mandatory fields to fill out

Quantity

Required delivery date

Operating data

Pipe line

DN

PN

Pipe material

Process medium

Type of media

Liquid

Steam

Gas

Valve features

Specification key

2063

(automatically transferred from p. 15)

Surface finish (if not standard)

internal µm

external µm

Pilot pressure

min.

max.

ATEX II 2GD Mechanical

Automation unit features

Click on the orange box "More info" ... you will come to our website for the resp. product where you can download the data sheet.

Electrical Feedback

Type 8697

For actuator size 50 to 130



- LED-position indicator
- Micro- or proximity switches for end position feedback
- Gehäuse nach IP 65/67, 4X Rating
- Optional intrinsically safe version acc. to ATEX / IECEx

Position feedback switches

Micro-switch 24V DC

Electrical connection

Cable gland

Micro-switch 50 – 225 V DC/AC

M12 plug

Inductive switch 3-wire PNP

(only with inductive switch

Inductive switch 2-wire NAMUR

3-wire PNP)

Inductive switch 2-wire 24V DC

No. of Position feedback switches

2x

ATEX cat. 3GD, IECEx

ATEX cat. 2DG, IECEx

without

Continued on next page →

Valve system On/Off with stainless steel actuator Type 8801-DV, continued

Certifications

- Certificate of compliance with the order EN-ISO 10204 2.1 (order no. 440788)
- Test report 2.2 2.2 EN-ISO 10204 (order no. 803722)
- Test certificate 3.1 according to EN-ISO 10204 (included with forged housing version)
- Certification of conformity for surface quality DIN 4762-DIN 4768-ISO / 4287/1 (order no. 804 175)
- Certification of conformity for pickling and electro polish processes (order no. 444 900)
- Food & Beverage (according to EC Directive 1935/2004 / EC)
- Certification according to FDA and USP

Comment /sketch
