

## Gas ultrasonic flowmeter for permanent installation

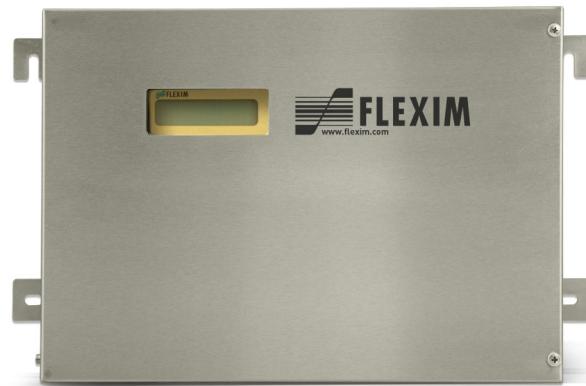
Transmitter for permanent outdoor wall or pipe mounting

### Features

- Precise bidirectional and highly dynamic flow measurement with the non-invasive clamp-on technology
- Up to 4 measuring channels to compensate highly disturbed flow profiles and to facilitate more accurate and repeatable measurements
- Best suitable for applications with limited straight runs
- High precision at fast and slow flow rates, high temperature and zero point stability
- Automatic loading of calibration data and transducer detection for a fast and easy set-up (less than 5 min), providing precise and long-term stable results
- User-friendly design
- Transducers available for a wide range of inner pipe diameters and fluid temperatures
- Transmitter and transducers for usage in hazardous areas are available
- Measurement is unaffected by gas density, viscosity, composition, dust, humidity, temperature or pressure

### Applications

- Process and control measurements in gas production, transportation and processing
- Check metering for custody transfer meter and health monitoring
- Lost and unaccounted for gas – segmentation metering and balancing
- Standard volume correction depending on temperature and pressure
- For application in explosive atmospheres (ATEX, IECEEx, FM Class I Div. 2)



FLUXUS G706




4 transducer pairs at one measuring point

<b>Function</b>	3
Measurement principle	3
Calculation of volumetric flow rate	3
Number of sound paths	4
Calculation of standard volumetric flow rate	5
 <b>Transmitter</b>	6
Technical data	6
Dimensions	9
2" pipe mounting kit	9
Terminal assignment	10
 <b>Transducers</b>	11
Transducer selection	11
Transducer order code	14
Technical data	15
 <b>Transducer mounting fixture</b>	26
 <b>Coupling materials for transducers</b>	28
 <b>Damping material (optional)</b>	29
Damping mats	29
Damping coat	30
 <b>Connection systems</b>	31
 <b>Junction box</b>	33
Technical data	33
Dimensions	34
2" pipe mounting kit	34
 <b>Clamp-on temperature probe (optional)</b>	35
Technical data	35
Fixation	37
Junction box	38

## Function
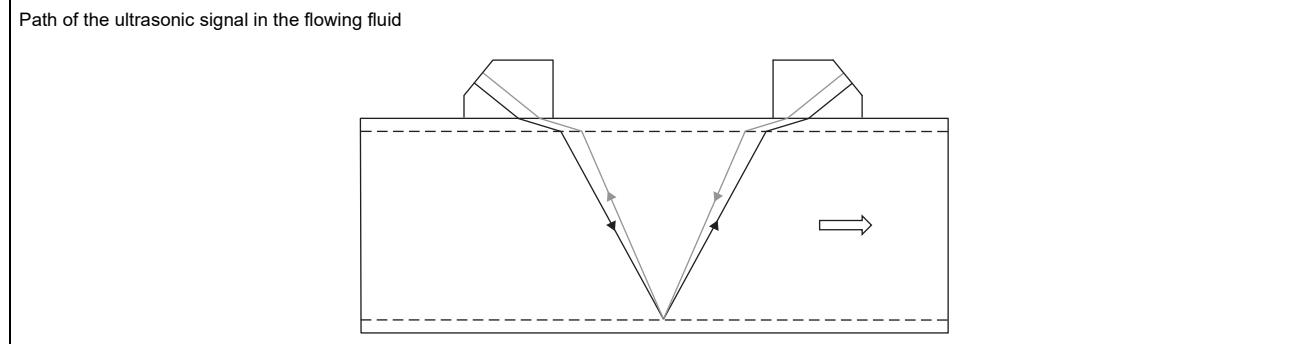
### Measurement principle


The transducers are mounted on the pipe which is completely filled with the fluid. The ultrasonic signals are emitted alternately by a transducer and received by the other. The physical quantities are determined from the transit times of the ultrasonic signals.



As the fluid where the ultrasound propagates is flowing, the transit time of the ultrasonic signal in flow direction is shorter than the one against the flow direction.

The transit time difference  $\Delta t$  is measured and allows the flowmeter to determine the average flow velocity along the propagation path of the ultrasonic signals. A flow profile correction is then performed in order to obtain the area averaged flow velocity, which is proportional to the volumetric flow rate.

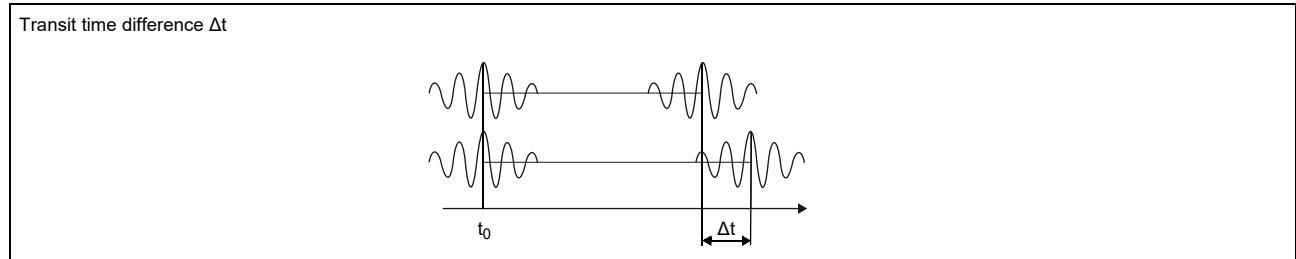The integrated microprocessors control the entire measuring cycle. The received ultrasonic signals are checked for measurement usability and evaluated for their reliability. Noise signals are eliminated.



### Calculation of volumetric flow rate

$$\dot{V} = k_{Re} \cdot A \cdot k_a \cdot \frac{\Delta t}{2 \cdot t_y}$$

where

- $\dot{V}$  - volumetric flow rate
- $k_{Re}$  - fluid mechanics calibration factor
- $A$  - cross-sectional pipe area
- $k_a$  - acoustical calibration factor
- $\Delta t$  - transit time difference
- $t_y$  - average of transit times in the fluid

## Number of sound paths

The number of sound paths is the number of transits of the ultrasonic signal through the fluid in the pipe. Depending on the number of sound paths, the following methods of installation exist:

- **reflection arrangement**

The number of sound paths is even. The transducers are mounted on the same side of the pipe. Correct positioning of the transducers is easy.

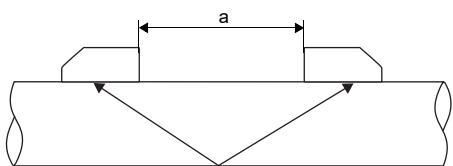
- **diagonal arrangement**

The number of sound paths is odd. The transducers are mounted on opposite sides of the pipe. In the case of a high signal attenuation by the fluid, pipe and coatings, diagonal arrangement with 1 sound path will be used.


The preferred method of installation depends on the application. While increasing the number of sound paths increases the accuracy of the measurement, signal attenuation increases as well. The optimum number of sound paths for the parameters of the application will be determined automatically by the transmitter.

As the transducers can be mounted with the transducer mounting fixture in reflection arrangement or diagonal arrangement, the number of sound paths can be adjusted optimally for the application.


Reflection arrangement, number of sound paths: 2



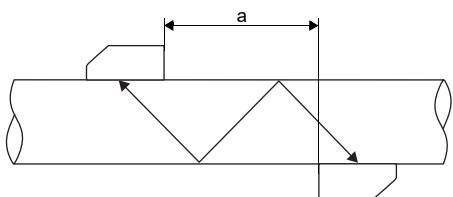
Diagonal arrangement, number of sound paths: 3



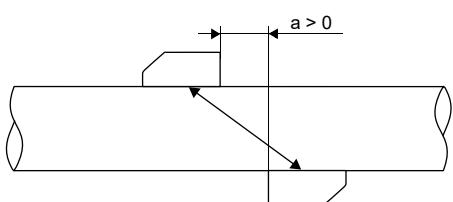Diagonal arrangement, number of sound paths: 1



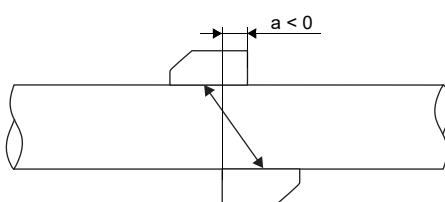Diagonal arrangement, number of sound paths: 1, negative transducer distance



a - transducer distance

## Calculation of standard volumetric flow rate

The standard volumetric flow rate can be selected as physical quantity. It is calculated with the following formula:

$$\dot{V}_N = \dot{V} \cdot \frac{p}{p_N} \cdot \frac{T_N}{T} \cdot \frac{1}{K}$$

where

$\dot{V}_N$  - standard volumetric flow rate

$\dot{V}$  - operating volumetric flow rate

$p_N$  - standard pressure (absolute value)

$p$  - operating pressure (absolute value)

$T_N$  - standard temperature in K

$T$  - operating temperature in K

$K$  compressibility coefficient of gas: ratio of the compressibility factors of the gas at operating conditions and at standard conditions  $Z/Z_N$

The operational pressure  $p$  and the operational temperature  $T$  of the fluid will be entered directly as fixed values into the transmitter.

or:

If inputs are installed (optional), pressure and temperature can be measured by the customer and fed in the transmitter.

The gas compressibility coefficient  $K$  of the gas is entered in the transmitter:

- as fixed value or
- as approximation, e.g. according to AGA8 or GERG

## Transmitter

### Technical data

	FLUXUS G706**-NN FLUXUS G706**-A2	FLUXUS G706**-F2
		
design	field device with 4 measuring channels in stainless steel housing	
measurement		
measurement principle	transit time difference correlation principle	
flow velocity	m/s	0.01...35, depending on pipe diameter
repeatability		0.15 % MV ±0.005 m/s
fluid	all acoustically conductive gases, e.g. nitrogen, air, oxygen, hydrogen, argon, helium, ethylene, propane	
temperature compensation	corresponding to the recommendations in ANSI/ASME MFC-5.1-2011	
measurement uncertainty (volumetric flow rate)		
measurement uncertainty of the measuring system <sup>1</sup>	±0.3 % MV ±0.005 m/s	
measurement uncertainty at the measuring point	±1...2 % MV ±0.005 m/s, depending on the application	
transmitter		
power supply	<ul style="list-style-type: none"> <li>• 100...230 V/50...60 Hz or</li> <li>• 20...32 V DC or</li> <li>• 11...16 V DC</li> </ul>	
power consumption	W	< 20
number of measuring channels		4
damping	s	0...100 (adjustable)
measuring cycle	Hz	100...1000 (1 channel)
response time	s	1 (1 channel)
housing material	stainless steel 316L (1.4404)	
degree of protection	IP66	
dimensions	mm	see dimensional drawing
weight	kg	7.2
fixation	wall mounting, optional: 2" pipe mounting	
ambient temperature	°C	-40...+60 (< -20 °C without operation of the display)       -20...+55
display	2 x 16 characters, dot matrix, backlight	
menu language	English, German, French, Dutch, Spanish	
explosion protection		
• ATEX/IECEx		
transmitter	G706**-A2	-
marking	C E 0637 Ex II3G Ex nA nC ic IIC T4 Gc Ex tb IIIC T120 °C Db T <sub>a</sub> -40...+60 °C	-
certification ATEX	IBExU11ATEX1015	-
certification IECEx	IECEx IBE 11.0008	-
• FM		
marking	-	 NI/Cl. I,II,III/Div. 2/ GP. A,B,C,D,E,F,G/ T5 -20°C≤Ta≤55°C IP64
measuring functions		
physical quantities	operating volumetric flow rate, standard volumetric flow rate, mass flow rate, flow velocity	
totaliser	volume, mass	
calculation functions	average, difference, sum	
diagnostic functions	sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times	

<sup>1</sup> with aperture calibration of the transducers

<sup>2</sup> outside the explosive atmosphere (housing cover open)

	<b>FLUXUS G706**-NN FLUXUS G706**-A2</b>	<b>FLUXUS G706**-F2</b>
<b>communication interfaces</b>		
service interfaces	<ul style="list-style-type: none"> <li>• RS232<sup>1</sup></li> <li>• USB (with adapter)<sup>1</sup></li> </ul>	
process interfaces	max. 1 option: <ul style="list-style-type: none"> <li>• RS485 (ASCII sender)</li> <li>• Modbus RTU</li> <li>• HART</li> <li>• FF H1</li> <li>• SD card (nonEx)</li> </ul>	max. 1 option: <ul style="list-style-type: none"> <li>• RS485 (ASCII sender)</li> <li>• Modbus RTU</li> <li>• HART</li> <li>• FF H1</li> </ul>
<b>accessories</b>		
data transmission kit		
• cable	RS232	
• adapter	RS232 - USB	
software	<ul style="list-style-type: none"> <li>• FluxDiagReader: reading of measured values and parameters, graphical presentation</li> <li>• FluxDiag (optional): reading of measurement data, graphical presentation, report generation</li> </ul>	
<b>data logger</b>		
loggable values	all physical quantities, totalised physical quantities and diagnostic values	
capacity	> 100 000 measured values	
<b>SD card, removable (nonEx, optional)</b>		
loggable values	all physical quantities and totalised physical quantities	
capacity	min. 2 GB	
<b>outputs</b>		
	The outputs are galvanically isolated from the transmitter.	
number	on request active inputs and outputs: max. 4	
<b>• switchable current output</b>		
	All switchable current outputs are jointly switched to active or passive.	
range	mA	4...20 (3.2...22)
accuracy		0.04 % MV ±3 µA
active output		$R_{ext} < 350 \Omega$
passive output		$U_{ext} = 8...30 \text{ V}$ , depending on $R_{ext}$ ( $R_{ext} < 1 \text{ k}\Omega$ at 30 V)
<b>• HART</b>		
range	mA	4...20
accuracy		0.1 % MV ±15 µA
active output		$U_{int} = 24 \text{ V}$ , $R_{ext} < 500 \Omega$
passive output		$U_{ext} = 10...24 \text{ V DC}$ , depending on $R_{ext}$ ( $R_{ext} < 1 \text{ k}\Omega$ at 24 V)
<b>• voltage output</b>		
range	V	0...1 or 0...10
accuracy		0...1 V: 0.1 % MV ±1 mV 0...10 V: 0.1 % MV ±10 mV
internal resistance		$R_{int} = 500 \Omega$
<b>• frequency output</b>		
range	kHz	0...5
optorelay		24 V/4 mA, $R_{int} = 66.5 \Omega$
<b>• binary output</b>		
optorelay		26 V/100 mA
open collector		24 V/4 mA, P1...P6: $R_{int} = 22 \Omega$
Reed relay		48 V/100 mA, P1...P6: $R_{int} = 22 \Omega$
binary output as alarm output		
• functions		limit, change of flow direction or error
binary output as pulse output		
• functions		mainly for totalising
• pulse value	units	0.01...1000
• pulse width	ms	optorelay: 1...1000 Reed relay, open collector: 80...1000

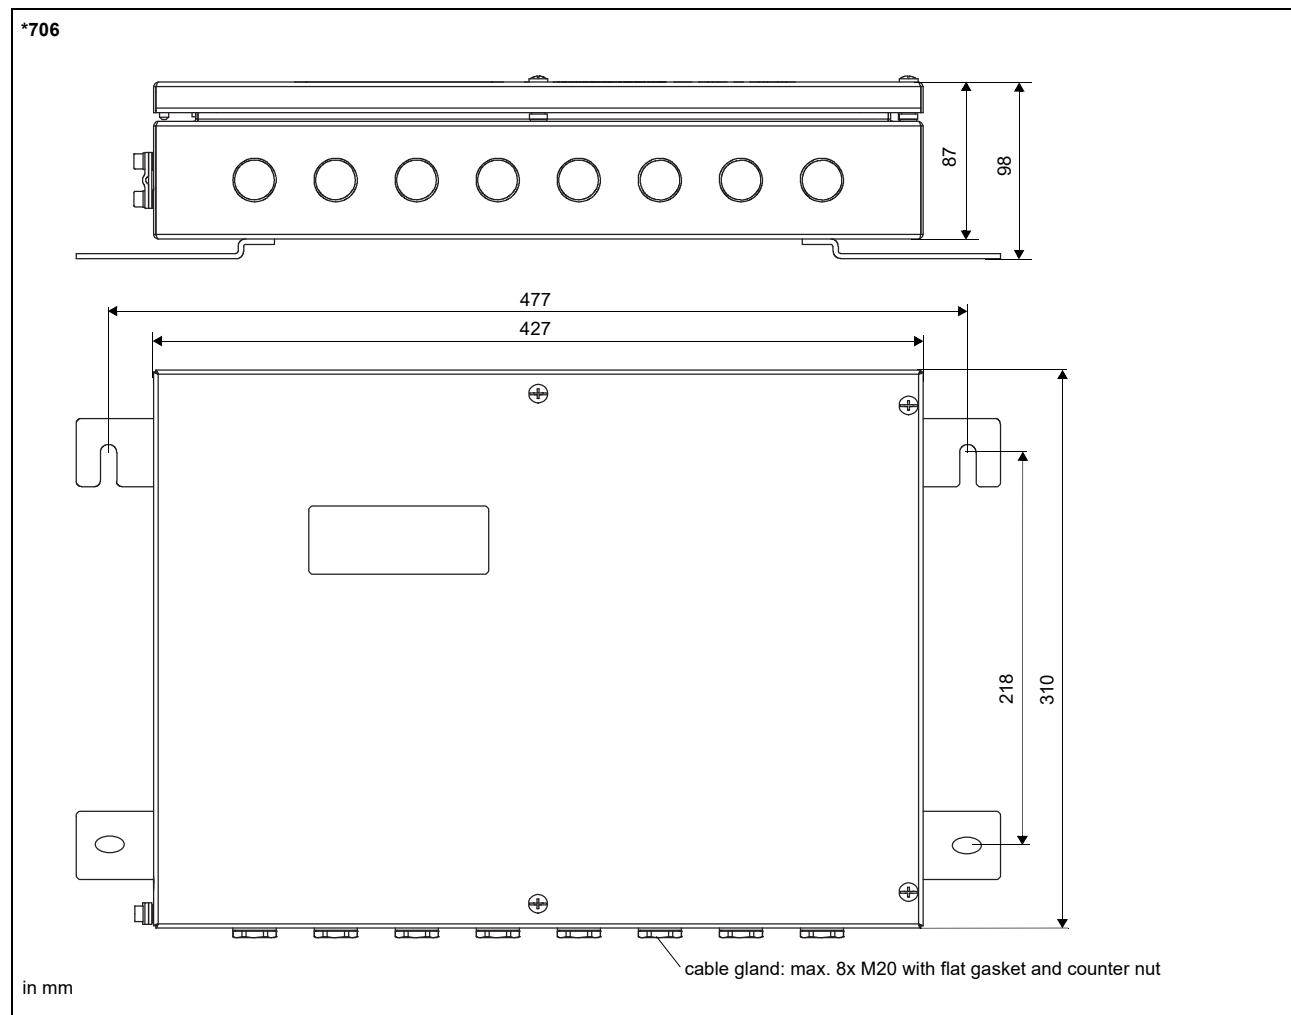
<sup>1</sup> with aperture calibration of the transducers<sup>2</sup> outside the explosive atmosphere (housing cover open)

	FLUXUS G706**-NN FLUXUS G706**-A2	FLUXUS G706**-F2
<b>inputs</b>		
	The inputs are galvanically isolated from the transmitter.	
number	max. 4, on request active inputs and outputs: max. 4	
<b>• temperature input</b>		
type	Pt100/Pt1000	
connection	4-wire	
range	°C	-150...+560
resolution	K	0.01
accuracy		±0.01 % MV ±0.03 K
<b>• current input</b>		
accuracy		0.1 % MV ±10 µ
active input		$U_{int} = 24 \text{ V}$ , $R_{int} = 50 \Omega$ , $P_{int} < 0.5 \text{ W}$ , not short-circuit proof
• range	mA	0...20
passive input		$R_{int} = 50 \Omega$ , $P_{int} < 0.3 \text{ W}$
• range	mA	-20...+20
<b>• voltage input</b>		
range	V	0...1
accuracy		0.1 % MV ±1 mV
internal resistance		$R_{int} = 1 \text{ M}\Omega$
<b>• binary input</b>		
switching signal		5..30 V, 1 mA
functions		<ul style="list-style-type: none"> <li>• reset of the measured values</li> <li>• reset of the totalisers</li> <li>• stop of the totalisers</li> <li>• activation of the measuring mode for highly dynamic flows</li> </ul>


<sup>1</sup> with aperture calibration of the transducers

<sup>2</sup> outside the explosive atmosphere (housing cover open)


## Dimensions



## 2" pipe mounting kit

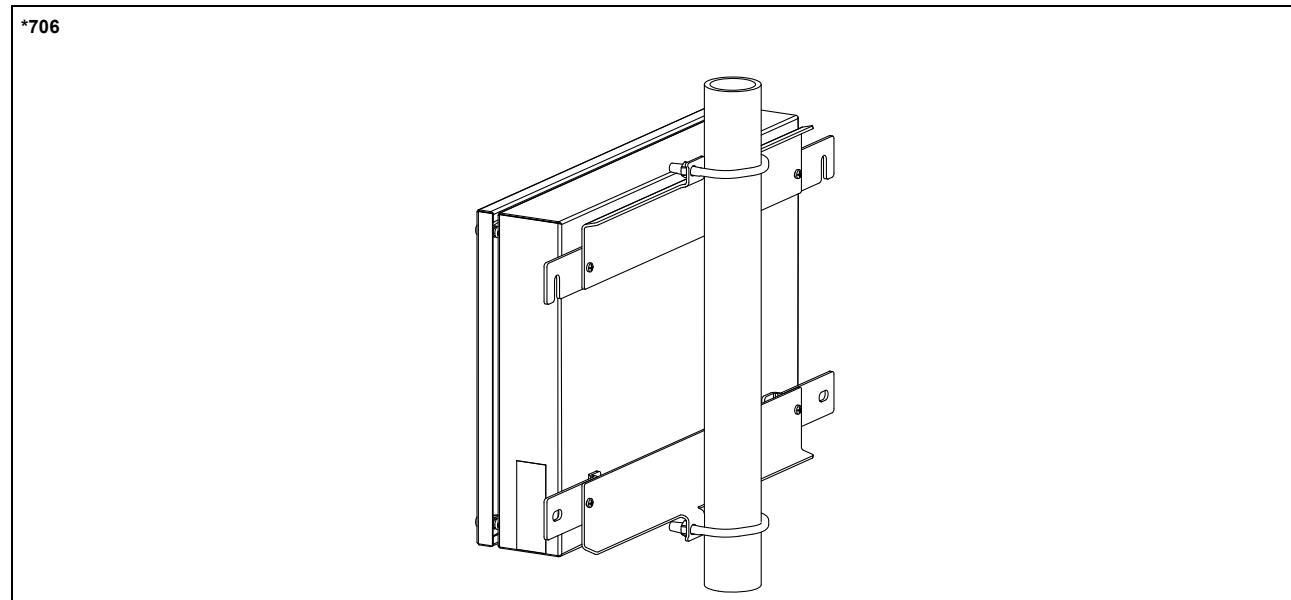

## Terminal assignment

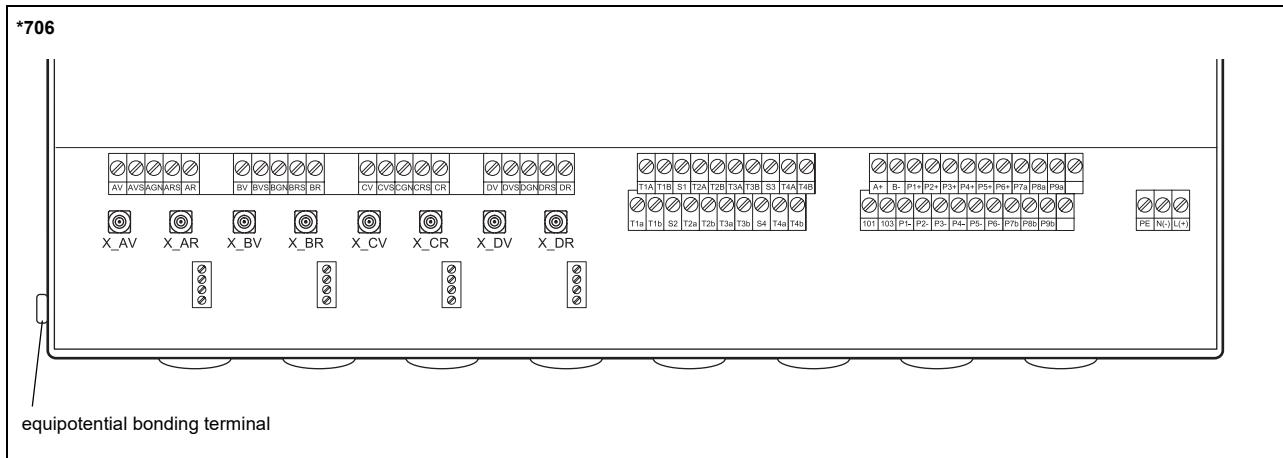

### power supply<sup>1</sup>

terminal	connection (AC)	connection (DC)
PE	earth	earth
N(-)	neutral	-
L(+)	phase	+

### transducers

transducer cable (transducers \*\*\*\*8\*, \*\*\*\*L1\*)  
extension cable (transducers \*\*\*\*8\*, \*\*\*\*L1\*, \*\*\*\*52)

#### measuring channel A, B, C, D

terminal	connection	transducer	terminal	connection
xV	signal	↑	X_xV	SMB connector
xVS	shield			
xRS	shield	↗	X_xR	SMB connector
xR	signal			

### outputs<sup>1, 2</sup>

terminal	connection	terminal	connection	communication interface
P1+...P6+	current output, voltage output, frequency output, binary output (Reed relay, open collector), HART (P1)	A+	signal +	• RS485 • Modbus RTU • FF
P1-...P6-		B-	signal -	
P7a...P9a P7b...P9b	binary output (Reed relay, optorelay)	101	shield	

### analog inputs<sup>1, 2</sup>

terminal	temperature probe	passive sensor	active sensor
terminal	direct connection	connection with extension cable	connection
T1a...T4a	red	red	not connected
T1A...T4A	red/blue	grey	-
T1b...T4b	white/blue	blue	+
T1B...T4B	white	white	not connected
S1, S3	shield	shield	not connected

### binary inputs<sup>1, 2</sup>

terminal	
P1+...P2+, P1...P2-	

<sup>1</sup> cable (by customer):

- e.g. flexible wires, with insulated wire ferrules, wire cross-section: 0.5...1.5 mm<sup>2</sup>
- with ferrite nut outer diameter of the cable max. 7.6 mm

<sup>2</sup> The number, type and terminal assignment are customised.

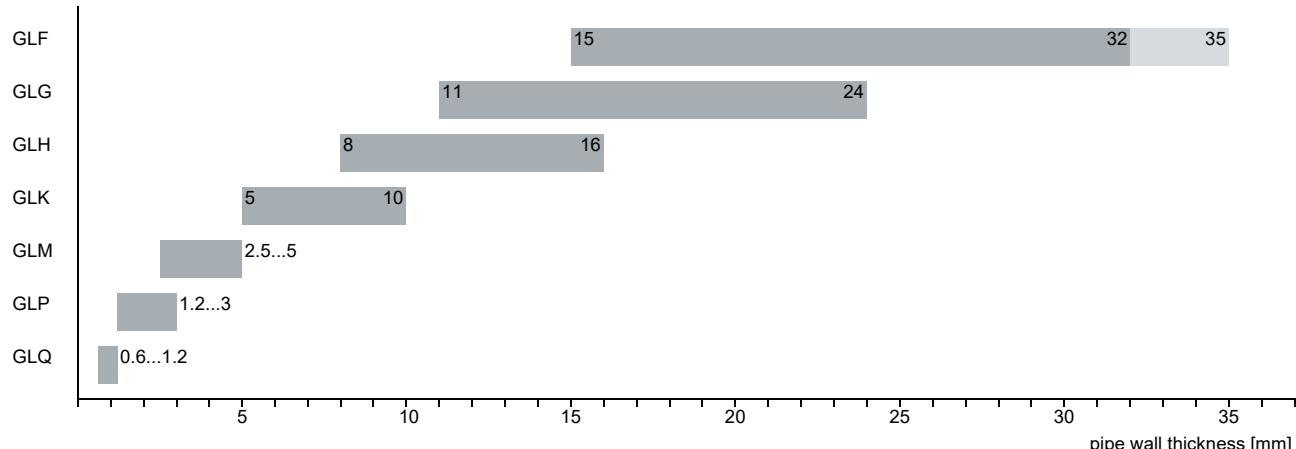
## Transducers

### Transducer selection

#### Step 1a

Select a Lamb wave transducer:


transducer order code



#### Step 1b

If the pipe wall thickness is not in the range of the Lamb wave transducers, select a shear wave transducer:

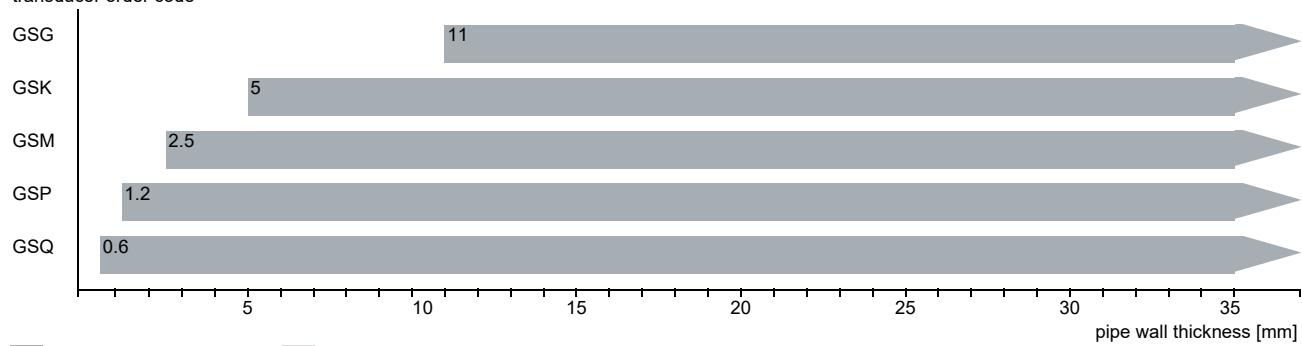transducer order code




#### Step 2

inner pipe diameter  $d$  dependent on the flow velocity  $v$  of the fluid in the pipe

The transducers are selected from the characteristics (see next page). Lamb wave transducers are selected from the left column, shear wave transducers from the right column.

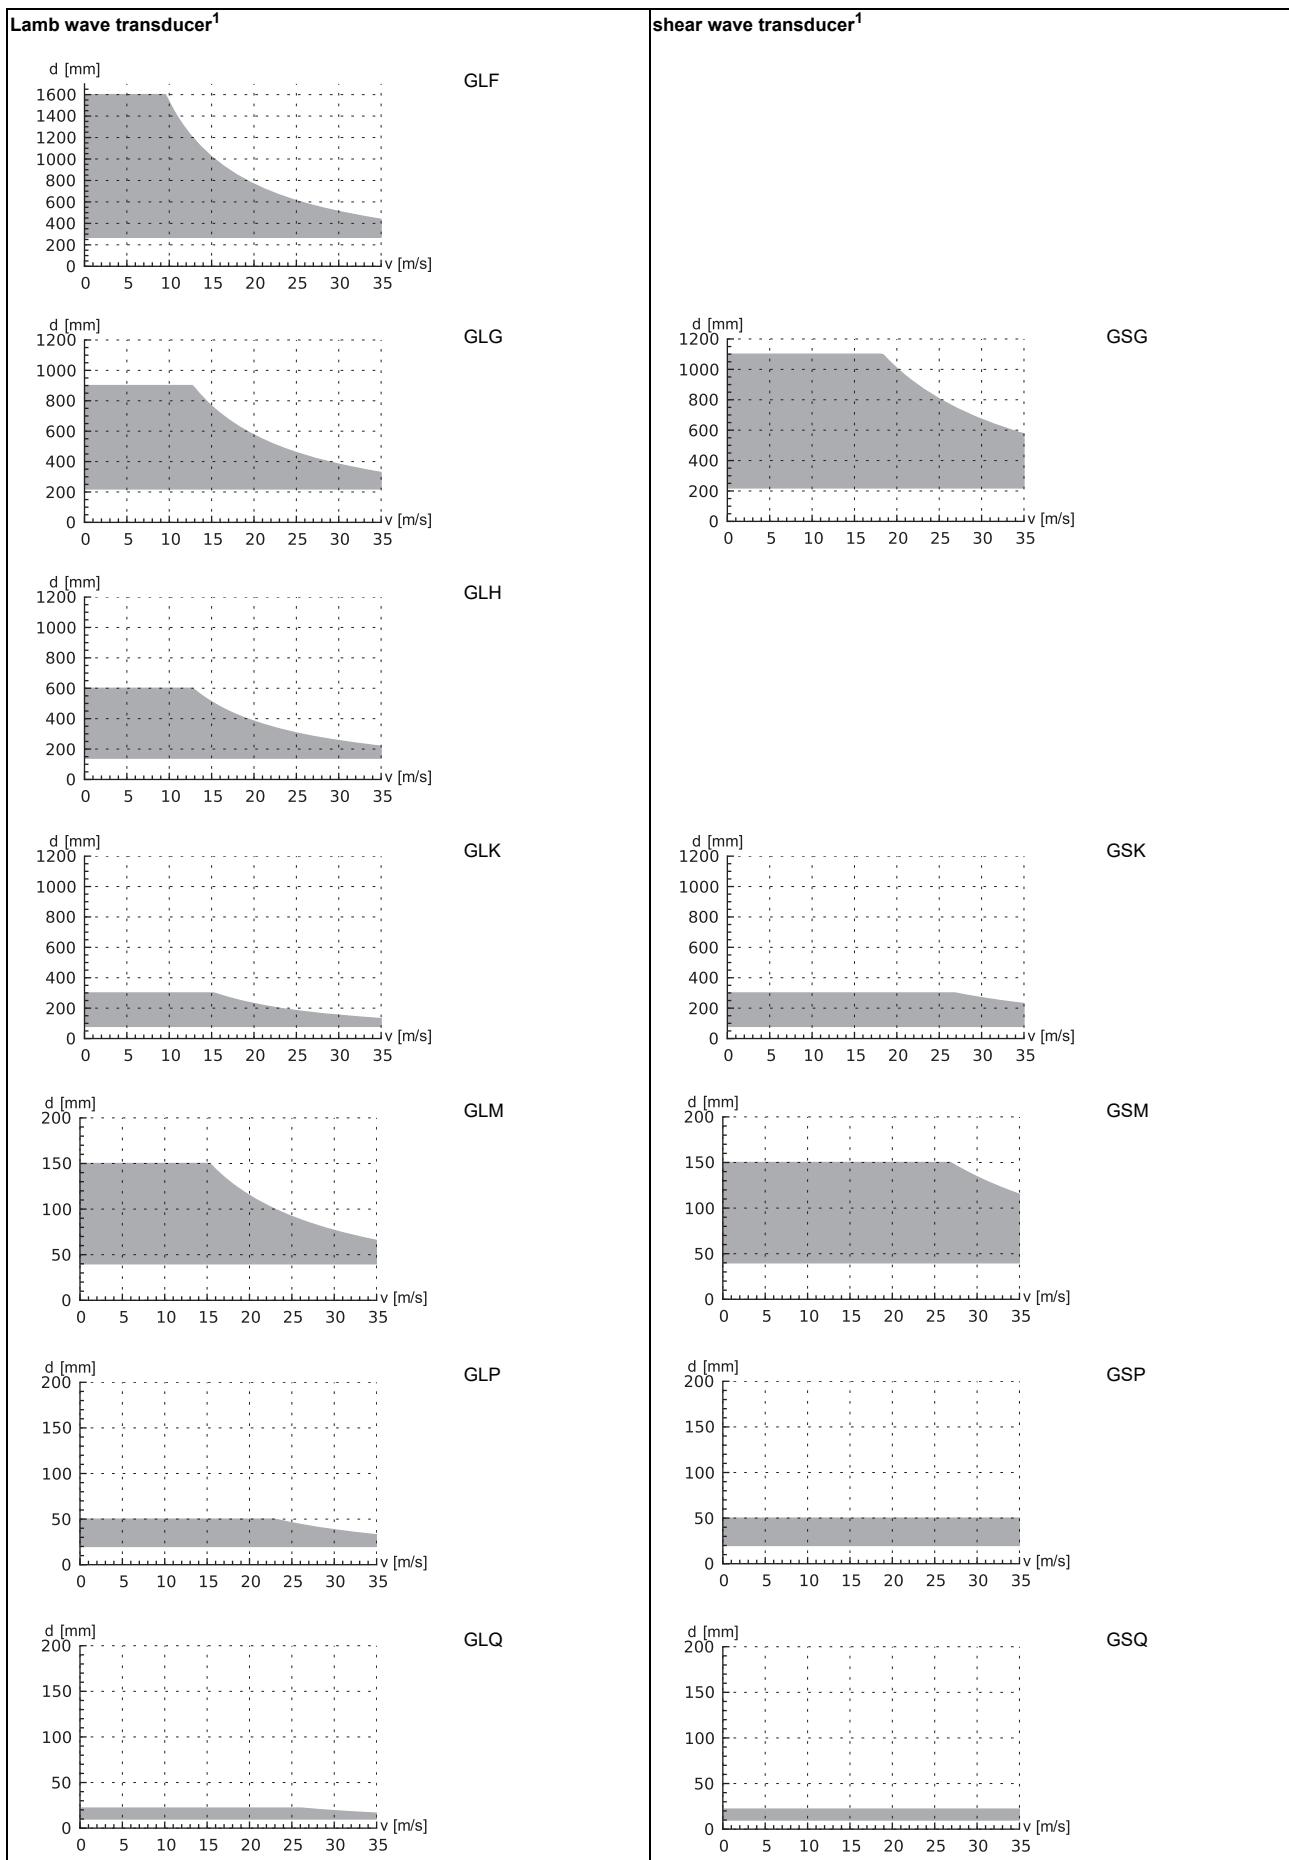Lamb wave transducers: If the values  $d$  and  $v$  are not in the range, the diagonal arrangement with 1 sound path may be used, i.e. the same characteristics can be used with doubling the inner pipe diameter. If the values are still not in the range, shear waves transducers regarding the pipe wall thickness have to be selected in step 1b.



<sup>1</sup> inner pipe diameter and max. flow velocity for a typical application with natural gas, nitrogen, oxygen in reflection arrangement with 2 sound paths (Lamb wave transducers)/1 sound path (shear wave transducers)

**Step 3**

min. fluid pressure

Lamb wave transducer			
transducer order code	fluid pressure <sup>1</sup> [bar]		
	metal pipe min.	plastic pipe min. extended	plastic pipe min.
GLF	15	10	1
GLG	15	10	1
GLH	15	10	1
GLK	15 (d > 120 mm) 10 (d < 120 mm)	10 (d > 120 mm) 3 (d < 120 mm)	1
GLM	10 (d > 60 mm) 5 (d < 60 mm)	3 (d < 60 mm)	1
GLP	10 (d > 35 mm) 5 (d < 35 mm)	3 (d < 35 mm)	1
GLQ	10 (d > 15 mm) 5 (d < 15 mm)	3 (d < 15 mm)	1

shear wave transducer			
transducer order code	fluid pressure <sup>1</sup> [bar]		
	metal pipe min.	plastic pipe min. extended	plastic pipe min.
GSG	30	20	1
GSK	30	20	1
GSM	30	20	1
GSP	30	20	1
GSQ	30	20	1

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

d - inner pipe diameter

**Example**

step					
1	pipe wall thickness	mm	14.3	8.6	38
	selected transducer		GLG or GLH	GLH or GLK	GS
2	inner pipe diameter	mm	581	96.8	143
	max. flow velocity	m/s	15	30	30
	selected transducer		GLG	GLK	GSK
3	min. fluid pressure	bar	20	15	40
	selected transducer		GLG	GLK	GSK

**Step 4**

for the characters 4...11 of the transducer order code (ambient temperature, explosion protection, connection system, extension cable) see page 14

**Step 5**

for the technical data of the selected transducer see page 15 et seqq.

## Transducer order code

1, 2	3	4	5, 6	7, 8	9...11	no. of character			
transducer	transducer frequency	-	ambient temperature	explosion protection	connection system	extension cable	/	option	description
GS	set of ultrasonic flow transducers for gas measurement, shear wave								
GL	set of ultrasonic flow transducers for gas measurement, Lamb wave								
F	0.15 MHz								
G	0.2 MHz								
H	0.3 MHz								
K	0.5 MHz								
M	1 MHz								
P	2 MHz								
Q	4 MHz								
N	normal temperature range								
E	extended temperature range								
NN	not explosion-proof								
A2	ATEX zone 2/IECEx zone 2								
A1	ATEX zone 1/IECEx zone 1								
F2	FM Class I Div. 2								
TS	direct connection or connection via junction box								
XXX	0 m: without extension cable > 0 m: with extension cable								
	LC	long transducer cable							
	IP68	degree of protection IP68							
	OS	housing with stainless steel 316							

## Technical data

### Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS)

order code	GSG-N**TS/**	GSK-N**TS/**	GSM-N**TS/**	GSP-N**TS/**	GSQ-N**TS/**
technical type	G(DL)G1N52	G(DL)K1N52	G(DL)M2N52	G(DL)P2N52	G(DL)Q2N52
transducer frequency MHz	0.2	0.5	1	2	4
<b>fluid pressure<sup>1</sup></b>					
min. extended	bar	metal pipe: 20			
min.	bar	metal pipe: 30, plastic pipe: 1			
<b>inner pipe diameter d<sup>2</sup></b>					
min. extended	mm	180	60	30	15
min. recommended	mm	220	80	40	20
max. recommended	mm	900	300	150	50
max. extended	mm	1100	360	180	60
<b>pipe wall thickness</b>					
min.	mm	11	5	2.5	1.2
<b>material</b>					
housing		PEEK with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)			
contact surface		PEEK			
degree of protection		IP67			
<b>transducer cable</b>					
type		1699			
length	m	5		4	3
length ***-****/LC	m	9			
<b>dimensions</b>					
length l	mm	129.5	126.5	64	40
width b	mm	51	51	32	22
height h	mm	67	67.5	40.5	25.5
dimensional drawing					
weight (without cable)	kg	0.47	0.36	0.066	0.016
<b>pipe surface temperature</b>					
min.	°C	-40			
max.	°C	+130			
<b>ambient temperature</b>					
min.	°C	-40			
max.	°C	+130			
temperature compensation		x			
<b>explosion protection</b>					
• ATEX/IECEx					
order code		GSG-NA2TS/**	GSK-NA2TS/**	GSM-NA2TS/**	GSP-NA2TS/**
pipe surface temperature (Ex)					
• min.	°C	-55			
• max.	°C	gas: +190, dust: +180			
marking		 0637 II3G II2D Ex nA IIC T6...T3 Gc Ex tb IIIC T80 °C...T185 °C Db			
certification ATEX		IBExU10ATEX1163 X			
certification IECEx		IECEx IBE 12.0005X			
• FM					
order code		GSG-NF2TS/**	GSK-NF2TS/**	GSM-NF2TS/**	GSP-NF2TS/**
pipe surface temperature (Ex)					
• min.	°C	-40			
• max.	°C	+125	+190		
degree of protection		IP66			
marking		 NI/CI. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860			

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

**Shear wave transducers (zone 2 - nonEx, TS, IP68)**

order code	GSG-N**TS/IP68	GSK-N**TS/IP68	GSM-N**TS/IP68	GSP-N**TS/IP68			
technical type	GDG1LI8	GDK1LI8	GDM2LI8	GDP2LI8			
transducer frequency MHz	0.2	0.5	1	2			
<b>fluid pressure<sup>1</sup></b>							
min. extended	bar	metal pipe: 20					
min.	bar	metal pipe: 30, plastic pipe: 1					
<b>inner pipe diameter d<sup>2</sup></b>							
min. extended	mm	180	60	30			
min. recommended	mm	220	80	40			
max. recommended	mm	900	300	150			
max. extended	mm	1100	360	180			
<b>pipe wall thickness</b>							
min.	mm	11	5	2.5			
<b>material</b>							
housing		PEEK with stainless steel cover 316Ti (1.4571)					
contact surface		PEEK					
degree of protection		IP68 <sup>3</sup>					
<b>transducer cable</b>							
type		2550					
length	m	12					
<b>dimensions</b>							
length l	mm	130	72				
width b	mm	54	32				
height h	mm	83.5	46				
dimensional drawing							
weight (without cable)	kg	0.43	0.085				
<b>pipe surface temperature</b>							
min.	°C	-40					
max.	°C	+100					
<b>ambient temperature</b>							
min.	°C	-40					
max.	°C	+100					
temperature compensation		x					
<b>explosion protection</b>							
• ATEX/IECEx							
order code		GSG-NA2TS/IP68	GSK-NA2TS/IP68	GSM-NA2TS/IP68			
pipe surface temperature (Ex)		GSP-NA2TS/IP68					
• min.	°C	-40					
• max.	°C	gas: +90, dust: +80					
marking		 Ex nA IIC T6...T5 Gc Ex tb IIIC T80 °C...T85 °C Db					
certification ATEX		IBExU10ATEX1163 X					
certification IECEx		IECEx IBE 12.0005X					

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

<sup>3</sup> test conditions: 3 months/2 bar (20 m)/20 °C

**Shear wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS, extended temperature range)**

order code		GSG-ENNTS/**	GSK-ENNTS/**	GSM-E**TS/**	GSP-E**TS/**	GSQ-E**TS/**
technical type		G(DL)G1E52	G(DL)K1E52	G(DL)M2E52	G(DL)P2E52	G(DL)Q2E52
transducer frequency MHz	0.2	0.5	1	2	4	
<b>fluid pressure<sup>1</sup></b>						
min. extended	bar	metal pipe: 20		metal pipe: 20		
min.	bar	metal pipe: 30, plastic pipe: 1		metal pipe: 30, plastic pipe: 1		
<b>inner pipe diameter d<sup>2</sup></b>						
min. extended	mm	180	60	30	15	7
min. recommended	mm	220	80	40	20	10
max. recommended	mm	900	300	150	50	22
max. extended	mm	1100	360	180	60	30
<b>pipe wall thickness</b>						
min.	mm	11	5	2.5	1.2	0.6
<b>material</b>						
housing		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)		PI with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)		
contact surface		PPSU		PI		
degree of protection		IP65		IP56		
<b>transducer cable</b>						
type		1699		6111		
length	m	5		4		3
length (***/****/LC)	m	9		9		
<b>dimensions</b>						
length l	mm	129.5		64	40	
width b	mm	51		32	22	
height h	mm	67		40.5	25.5	
dimensional drawing						
weight (without cable)	kg	0.82		0.066	0.017	
<b>pipe surface temperature</b>						
min.	°C	40		30	-30	
max.	°C	+170		+240 <sup>3</sup>	+200	
<b>ambient temperature</b>						
min.	°C	-40		-30	-30	
max.	°C	+170		+40 +60 <sup>4</sup> +200 <sup>5</sup>	+200	
temperature compensation		x		x		
<b>explosion protection</b>						
• ATEX/IECEx						
order code		-	-	GSM-EA2TS/**	GSP-EA2TS/**	GSQ-EA2TS/**
pipe surface temperature (Ex)						
• min.	°C	-	-	-45		
• max.	°C	-	-	gas: +235 <sup>3</sup> , dust: +225 <sup>3</sup>		
marking		-	-	CE 0637 Ex II3G II2D		
				Ex nA IIC T6...T2 Gc		
				Ex tb IIIA T80 °C...230 °C Db		
certification ATEX		-	-	IBExU10ATEX1163 X		
certification IECEx		-	-	IECEx IBE 12.0005X		
• FM						
order code		-	-	GSM-EF2TS/**	GSP-EF2TS/**	GSQ-EF2TS/**
pipe surface temperature (Ex)						
• min.	°C	-	-	-40		
• max.	°C	-	-	+235 <sup>3</sup>		
degree of protection		-	-	IP66		
marking		-	-	NI/CI. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860		

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

<sup>3</sup> > +200 °C:

Variofix C without cover or Variofix L

observe the insulation instruction

Ex: ambient temperature max. +40 °C

<sup>4</sup> pipe surface temperature +200...+240 °C: Variofix C without cover

<sup>5</sup> pipe surface temperature max. +200 °C

**Shear wave transducers (zone 1, TS)**

order code	GSG-N*1TS/**	GSK-N*1TS/**	GSM-N*1TS/**	GSP-N*1TS/**	GSQ-N*1TS/**				
technical type	G(DL)G1N81	G(DL)K1N81	G(DL)M2N81	G(DL)P2N81	G(DL)Q2N81				
transducer frequency MHz	0.2	0.5	1	2	4				
<b>fluid pressure<sup>1</sup></b>									
min. extended	bar	metal pipe: 20							
min.	bar	metal pipe: 30, plastic pipe: 1							
<b>inner pipe diameter d<sup>2</sup></b>									
min. extended	mm	180	60	30	15				
min. recommended	mm	220	80	40	20				
max. recommended	mm	900	300	150	50				
max. extended	mm	1100	360	180	60				
<b>pipe wall thickness</b>									
min.	mm	11	5	2.5	1.2				
<b>material</b>									
housing		PEEK with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)							
contact surface		PEEK							
degree of protection		IP65	IP66		IP65				
<b>transducer cable</b>									
type		1699							
length	m	5		4	3				
length (***/****/LC)	m	9							
<b>dimensions</b>									
length l	mm	129.5	126.5	64	40				
width b	mm	51	51	32	22				
height h	mm	67	67.5	40.5	25.5				
dimensional drawing									
weight (without cable)	kg	0.47	0.36	0.066	0.016				
<b>pipe surface temperature</b>									
min.	°C	-40							
max.	°C	+130							
<b>ambient temperature</b>									
min.	°C	-40							
max.	°C	+130							
temperature compensation		X							
<b>explosion protection</b>									
• ATEX/IECEx									
order code		GSG-NA1TS/**	GSK-NA1TS/**	GSM-NA1TS/**	GSP-NA1TS/**				
pipe surface temperature (Ex)									
• min.	°C	-55							
• max.	°C	+180							
marking		0637 II2G Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T185 °C Db							
certification ATEX		IBExU07ATEX1168 X							
certification IECEx		IECEx IBE 08.0007X							

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

**Shear wave transducers (zone 1, TS, IP68)**

order code		GSG-N*1TS/IP68	GSK-N*1TS/IP68	GSM-N*1TS/IP68	GSP-N*1TS/IP68
technical type		GDG1LI1	GDK1LI1	GDM2LI1	GDP2LI1
transducer frequency MHz	0.2	0.5	1	2	
<b>fluid pressure<sup>1</sup></b>					
min. extended	bar	metal pipe: 20			
min.	bar	metal pipe: 30, plastic pipe: 1			
<b>inner pipe diameter d<sup>2</sup></b>					
min. extended	mm	180	60	30	15
min. recommended	mm	220	80	40	20
max. recommended	mm	900	300	150	50
max. extended	mm	1100	360	180	60
<b>pipe wall thickness</b>					
min.	mm	11	5	2.5	1.2
<b>material</b>					
housing		PEEK with stainless steel cover 316Ti (1.4571)			
contact surface		PEEK			
degree of protection		IP68 <sup>3</sup>			
<b>transducer cable</b>					
type		2550			
length	m	12			
<b>dimensions</b>					
length l	mm	130		72	
width b	mm	54		32	
height h	mm	83.5		46	
dimensional drawing					
weight (without cable)	kg	0.43		0.085	
<b>pipe surface temperature</b>					
min.	°C	-40			
max.	°C	+100			
<b>ambient temperature</b>					
min.	°C	-40			
max.	°C	+100			
temperature compensation		x			
<b>explosion protection</b>					
<b>• ATEX/IECEx</b>					
order code		GSG-NA1TS/IP68	GSK-NA1TS/IP68	GSM-NA1TS/IP68	GSP-NA1TS/IP68
pipe surface temperature (Ex)					
• min.	°C	-40			
• max.	°C	+80			
marking		C E 0637 Ex II2G II2D Ex q IIC T6...T5 Gb Ex tb IIIC T80 °C...T85 °C Db			
certification ATEX		IBExU07ATEX1168 X			
certification IECEx		IECEx IBE 08.0007X			

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

<sup>3</sup> test conditions: 3 months/2 bar (20 m)/20 °C

**Shear wave transducers (zone 1, TS, extended temperature range)**

order code		GSG-E*1TS/**	GSK-E*1TS/**
technical type		G(DL)G1E83	G(DL)K1E83
transducer frequency	MHz	0.2	0.5
<b>fluid pressure<sup>1</sup></b>			
min. extended	bar	metal pipe: 20	
min.	bar	metal pipe: 30, plastic pipe: 1	
<b>inner pipe diameter d<sup>2</sup></b>			
min. extended	mm	180	60
min. recommended	mm	220	80
max. recommended	mm	900	300
max. extended	mm	1100	360
<b>pipe wall thickness</b>			
min.	mm	11	5
<b>material</b>			
housing		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)	
contact surface		PPSU	
degree of protection		IP65	
<b>transducer cable</b>			
type		1699	
length	m	5	
length (***-****/LC)	m	9	
<b>dimensions</b>			
length l	mm	129.5	
width b	mm	51	
height h	mm	67	
dimensional drawing			
weight (without cable)	kg	0.82	
<b>pipe surface temperature</b>			
min.	°C	-40	
max.	°C	+170	
<b>ambient temperature</b>			
min.	°C	-40	
max.	°C	+170	
temperature compensation		x	
<b>explosion protection</b>			
• ATEX/IECEx			
order code		GSG-EA1TS/**	GSK-EA1TS/**
pipe surface temperature (Ex)			
• min.	°C	-50	
• max.	°C	+155	
marking		CE 0637 Ex II2G Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T160 °C Db	
certification ATEX		IBExU07ATEX1168 X	
certification IECEx		IECEx IBE 08.0007X	

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

**Shear wave transducers (zone 1, TS, extended temperature range)**

order code	GSM-E*1TS/**	GSP-E*1TS/**	GSQ-E*1TS/**
technical type	G(DL)M2E85	G(DL)P2E85	G(DL)Q2E85
transducer frequency MHz	1	2	4
<b>fluid pressure<sup>1</sup></b>			
min. extended	bar	metal pipe: 20	
min.	bar	metal pipe: 30, plastic pipe: 1	
<b>inner pipe diameter d<sup>2</sup></b>			
min. extended	mm	30	15
min. recommended	mm	40	20
max. recommended	mm	150	50
max. extended	mm	180	60
<b>pipe wall thickness</b>			
min.	mm	2.5	1.2
<b>material</b>			
housing		PI with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)	
contact surface		PI	
degree of protection		IP66	IP56
<b>transducer cable</b>			
type		6111	
length	m	4	3
length (**-****/LC)	m	9	
<b>dimensions</b>			
length l	mm	64	40
width b	mm	32	22
height h	mm	40.5	25.5
dimensional drawing			
weight (without cable)	kg	0.066	0.017
<b>pipe surface temperature</b>			
min.	°C	-30	-30
max.	°C	+240 <sup>3</sup>	+200
<b>ambient temperature</b>			
min.	°C	-30	-30
max.	°C	+40 +200 <sup>4</sup>	+200
temperature compensation		x	
<b>explosion protection</b>			
• ATEX/IECEx			
order code	GSM-EA1TS/**	GSP-EA1TS/**	GSQ-EA1TS/**
pipe surface temperature (Ex)			
• min.	°C	-45	
• max.	°C	+225 <sup>3</sup>	
marking		C E 0637 II2G Ex q IIC T6...T2 Gb Ex tb IIIA T80 °C...T230 °C Db	II2D
certification ATEX		IBExU07ATEX1168 X	
certification IECEx		IECEx IBE 08.0007X	

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> shear wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended/max. extended: in reflection arrangement and for a flow velocity of 15 m/s

<sup>3</sup> > +200 °C :

Variofix L or Variofix C

observe the insulation instruction

ambient temperature max. +40 °C

<sup>4</sup> pipe surface temperature max. +200 °C

**Lamb wave transducers (zone 2 - FM Class I Div. 2 - nonEx, TS)**

order code	GLF-N**TS/**	GLG-N**TS/**	GLH-N**TS/**	GLK-N**TS/**	GLM-N**TS/**	GLP-N**TS/**	GLQ-N**TS/**
technical type	G(RT)F1N52	G(RT)G1N52	G(RT)H1N52	G(RT)K1N52	G(RT)M1N52	G(RT)P1N52	G(RT)Q1N52
transducer frequency [MHz]	0.15	0.2	0.3	0.5	1	2	4
<b>fluid pressure<sup>1</sup></b>							
min. extended	bar	metal pipe: 10		metal pipe: 10 (d > 120 mm) 3 (d < 120 mm)	metal pipe: 3 (d < 60 mm)	metal pipe: 3 (d < 35 mm)	metal pipe: 3 (d < 15 mm)
min.	bar	metal pipe: 15 plastic pipe: 1		metal pipe: 15 (d > 120 mm) 10 (d < 120 mm)	metal pipe: 10 (d > 60 mm) 5 (d < 60 mm)	metal pipe: 10 (d > 35 mm) 5 (d < 35 mm)	metal pipe: 10 (d > 15 mm) 5 (d < 15 mm)
<b>inner pipe diameter d<sup>2</sup></b>							
min. extended	mm	220	180	110	60	30	15
min. recommended	mm	270	220	140	80	40	20
max. recommended	mm	1200	900	600	300	150	50
max. extended	mm	1600	1400	1000	360	180	60
<b>pipe wall thickness</b>							
min.	mm	15	11	8	5	2.5	1.2
max.	mm	32	24	16	10	5	3
max. extended	mm	35	-	-	-	-	-
<b>material</b>							
housing	PPSU with stainless steel cover 316Ti (1.4571)	PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)					
contact surface	PPSU						
degree of protection	IP54	IP67		IP65			
<b>transducer cable</b>							
type	1699						
length	m	5			4		3
length (**-****/LC)	m	9					
<b>dimensions</b>							
length l	mm	163	128.5		74		42
width b	mm	54	51		32		22
height h	mm	91.3	67.5		40.5		25.5
dimensional drawing							
weight (without cable)	kg	0.935	0.471		0.077		0.019
<b>pipe surface temperature</b>							
min.	°C	-40					
max.	°C	+130					
<b>ambient temperature</b>							
min.	°C	-40					
max.	°C	+130					
temperature compensation		x					
<b>explosion protection</b>							
<b>• ATEX/IECEx</b>							
order code	GLF-NA2TS/**	GLG-NA2TS/**	GLH-NA2TS/**	GLK-NA2TS/**	GLM-NA2TS/**	GLP-NA2TS/**	GLQ-NA2TS/**
pipe surface temperature (Ex)							
• min.	°C	-50					
• max.	°C	gas: +165, dust: +155					
marking	0637 II3G II2D Ex nA IIC T6...T3 Gc Ex tb IIIA T80 °C...T160 °C Db	0637 II3G II2D Ex nA IIC T6...T3 Gc Ex tb IIIC T80 °C...T160 °C Db					
certification ATEX	IBExU10ATEX1163 X						
certification IECEx	IECEx IBE 12.0005X						
<b>• FM</b>							
order code	GLF-NF2TS/**	GLG-NF2TS/**	GLH-NF2TS/**	GLK-NF2TS/**	GLM-NF2TS/**	GLP-NF2TS/**	GLQ-NF2TS/**
pipe surface temperature (Ex)							
• min.	°C	-40					
• max.	°C	+165					
degree of protection		IP66					
marking	NI/CI. I,II,III/Div. 2 / GP A,B,C,D,E,F,G/ Temp. Codes dwg 3860						

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air<sup>2</sup> Lamb wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 15 m/s (30 m/s)

inner pipe diameter max. extended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 12 m/s (25 m/s)

**Lamb wave transducers (zone 2 - nonEx, TS, IP68)**

order code		GLF-N**TS/IP68	GLG-N**TS/IP68	GLH-N**TS/IP68	GLK-N**TS/IP68	GLM-N**TS/IP68	GLP-N**TS/IP68
technical type		GRF1LI8	GRG1LI8	GRH1LI8	GRK1LI8	GRM1LI8	GRP1LI8
transducer frequency	MHz	0.15	0.2	0.3	0.5	1	2
<b>fluid pressure<sup>1</sup></b>							
min. extended	bar	metal pipe: 10		metal pipe: 10 (d > 120 mm) 3 (d < 120 mm)	metal pipe: 3 (d < 60 mm)	metal pipe: 3 (d < 35 mm)	
min.	bar	metal pipe: 15 plastic pipe: 1		metal pipe: 15 (d > 120 mm) 10 (d < 120 mm)	metal pipe: 10 (d > 60 mm) 5 (d < 60 mm)	metal pipe: 10 (d > 35 mm) 5 (d < 35 mm)	plastic pipe: 1
<b>inner pipe diameter d<sup>2</sup></b>							
min. extended	mm	220	180	110	60	30	15
min. recommended	mm	270	220	140	80	40	20
max. recommended	mm	1200	900	600	300	150	50
max. extended	mm	1600	1400	1000	360	180	60
<b>pipe wall thickness</b>							
min.	mm	15	11	8	5	2.5	1.2
max.	mm	32	24	16	10	5	3
max. extended	mm	35	-	-	-	-	-
<b>material</b>							
housing		PPSU with stainless steel cover 316Ti (1.4571)					
contact surface		PPSU					
degree of protection		IP68 <sup>3</sup>					
<b>transducer cable</b>							
type		2550					
length	m	12					
<b>dimensions</b>							
length l	mm	173	143.5		73		
width b	mm	54	54		31.6		
height h	mm	91.5	83.5		46		
dimensional drawing							
weight (without cable)	kg	1.36	0.639		0.093		
<b>pipe surface temperature</b>							
min.	°C	-40					
max.	°C	+100					
<b>ambient temperature</b>							
min.	°C	-40					
max.	°C	+100					
temperature compensation		x					
<b>explosion protection</b>							
<b>• ATEX/IECEx</b>							
order code		GLF-NA2TS/IP68	GLG-NA2TS/IP68	GLH-NA2TS/IP68	GLK-NA2TS/IP68	GLM-NA2TS/IP68	GLP-NA2TS/IP68
pipe surface temperature (Ex)							
• min.	°C	-40					
• max.	°C	gas: +90, dust: +80					
marking		C E 0637 II3G Ex nA IIC T6...T5 Gc Ex tb IIIC T80 °C...T85 °C Db	II2D				
certification ATEX		IBExU10ATEX1163 X					
certification IECEx		IECEx IBE 12.0005X					

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air<sup>2</sup> Lamb wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 15 m/s (30 m/s)

inner pipe diameter max. extended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 12 m/s (25 m/s)

<sup>3</sup> test conditions: 3 months/2 bar (20 m)/20 °C

**Lamb wave transducers (zone 1, TS)**

order code	GLF-N*1TS/**	GLG-N*1TS/**	GLH-N*1TS/**	GLK-N*1TS/**	GLM-N*1TS/**	GLP-N*1TS/**	GLQ-N*1TS/**
technical type	G(RT)F1N83	G(RT)G1N83	G(RT)H1N83	G(RT)K1N83	G(RT)M1N83	G(RT)P1N83	G(RT)Q1N83
transducer frequency MHz	0.15	0.2	0.3	0.5	1	2	4
<b>fluid pressure<sup>1</sup></b>							
min. extended	bar	metal pipe: 10		metal pipe: 10 (d > 120 mm) 3 (d < 120 mm)	metal pipe: 3 (d < 60 mm)	metal pipe: 3 (d < 35 mm)	metal pipe: 3 (d < 15 mm)
min.	bar	metal pipe: 15 plastic pipe: 1		metal pipe: 15 (d > 120 mm) 10 (d < 120 mm)	metal pipe: 10 (d > 60 mm) 5 (d < 60 mm)	metal pipe: 10 (d > 35 mm) 5 (d < 35 mm)	metal pipe: 10 (d > 15 mm) 5 (d < 15 mm)
<b>inner pipe diameter d<sup>2</sup></b>							
min. extended	mm	220	180	110	60	30	15
min. recommended	mm	270	220	140	80	40	20
max. recommended	mm	1200	900	600	300	150	50
max. extended	mm	1600	1400	1000	360	180	60
<b>pipe wall thickness</b>							
min.	mm	15	11	8	5	2.5	1.2
max.	mm	32	24	16	10	5	3
max. extended	mm	35	-	-	-	-	-
<b>material</b>							
housing		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L, 316Ti		PPSU with stainless steel cover 304 (1.4301), ***-****/OS: 316L (1.4404)			
contact surface		PPSU					
degree of protection		IP54	IP66		IP65		
<b>transducer cable</b>							
type		1699					
length	m	5			4		3
length (**-****/LC)	m	9					
<b>dimensions</b>							
length l	mm	163	128.5		74		42
width b	mm	54	51		32		22
height h	mm	91.3	67.5		40.5		25.5
dimensional drawing							
weight (without cable)	kg	0.935	0.471		0.077		0.019
<b>pipe surface temperature</b>							
min.	°C	-40					
max.	°C	+130					
<b>ambient temperature</b>							
min.	°C	-40					
max.	°C	+130					
temperature compensation		x					
<b>explosion protection</b>							
• ATEX/IECEx							
order code	GLF-NA1TS/**	GLG-NA1TS/**	GLH-NA1TS/**	GLK-NA1TS/**	GLM-NA1TS/**	GLP-NA1TS/**	GLQ-NA1TS/**
pipe surface temperature (Ex)							
• min.	°C	-50					
• max.	°C	+155					
marking		II2G Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T160 °C Db T80 °C...T160 °C Db	II2G Ex q IIC T6...T3 Gb Ex tb IIIC T80 °C...T160 °C Db				
certification ATEX		IBExU07ATEX1168 X					
certification IECEx		IECEx IBE 08.0007X					

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> Lamb wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 15 m/s (30 m/s)

inner pipe diameter max. extended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 12 m/s (25 m/s)

**Lamb wave transducers (zone 1, TS, IP68)**

order code		GLF-N*1TS/IP68	GLG-N*1TS/IP68	GLH-N*1TS/IP68	GLK-N*1TS/IP68	GLM-N*1TS/IP68	GLP-N*1TS/IP68
technical type		GRF1LI3	GRG1LI3	GRH1LI3	GRK1LI3	GRM1LI3	GRP1LI3
transducer frequency	MHz	0.15	0.2	0.3	0.5	1	2
<b>fluid pressure<sup>1</sup></b>							
min. extended	bar	metal pipe: 10	metal pipe: 10	metal pipe: 10 (d > 120 mm) 3 (d < 120 mm)	metal pipe: 3 (d < 60 mm)	metal pipe: 3 (d < 35 mm)	
min.	bar	metal pipe: 15 plastic pipe: 1	metal pipe: 15 plastic pipe: 1	metal pipe: 15 (d > 120 mm) 10 (d < 120 mm)	metal pipe: 10 (d > 60 mm) 5 (d < 60 mm)	metal pipe: 10 (d > 35 mm) 5 (d < 35 mm)	plastic pipe: 1
<b>inner pipe diameter d<sup>2</sup></b>							
min. extended	mm	220	180	110	60	30	15
min. recommended	mm	270	220	140	80	40	20
max. recommended	mm	1200	900	600	300	150	50
max. extended	mm	1600	1400	1000	360	180	60
<b>pipe wall thickness</b>							
min.	mm	15	11	8	5	2.5	1.2
max.	mm	32	24	16	10	5	3
max. extended	mm	35	-	-	-	-	-
<b>material</b>							
housing		PPSU with stainless steel cover 316Ti (1.4571)	PPSU with stainless steel cover 316Ti (1.4571)				
contact surface		PPSU	PPSU				
degree of protection		IP68 <sup>3</sup>	IP68 <sup>3</sup>				
<b>transducer cable</b>							
type		2550	2550				
length	m	12	12				
<b>dimensions</b>							
length l	mm	173	143.5		73		
width b	mm	54	54		31.6		
height h	mm	91.5	83.5		46		
dimensional drawing							
weight (without cable)	kg	1.36	0.639		0.093		
<b>pipe surface temperature</b>							
min.	°C	-40	-40				
max.	°C	+100	+100				
<b>ambient temperature</b>							
min.	°C	-40	-40				
max.	°C	+100	+100				
temperature com- pensation		x	x				
<b>explosion protection</b>							
• ATEX/IECEx							
order code		GLF-NA1TS/IP68	GLG-NA1TS/IP68	GLH-NA1TS/IP68	GLK-NA1TS/IP68	GLM-NA1TS/IP68	GLP-NA1TS/IP68
pipe surface temperature (Ex)							
• min.	°C	-40					
• max.	°C	+80					
marking		CE 0637 Ex II2G II2D Ex q IIC T6...T5 Gb Ex tb IIIC T80 °C...T85 °C Db					
certification ATEX		IBExU07ATEX1168 X					
certification IECEx		IECEx IBE 08.0007X					

<sup>1</sup> depending on the application, typical absolute value for natural gas, nitrogen, compressed air

<sup>2</sup> Lamb wave transducer:

typical values for natural gas, nitrogen, oxygen; pipe diameters for other fluids on request

inner pipe diameter max. recommended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 15 m/s (30 m/s)

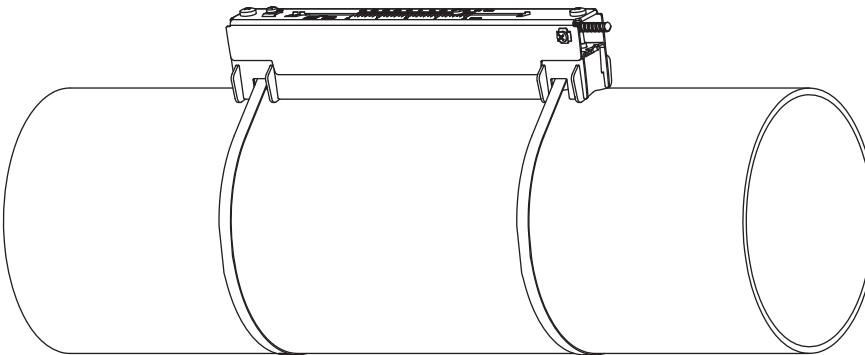
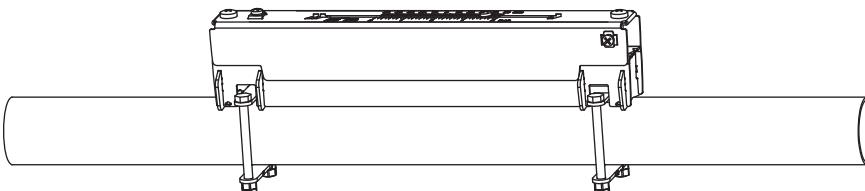
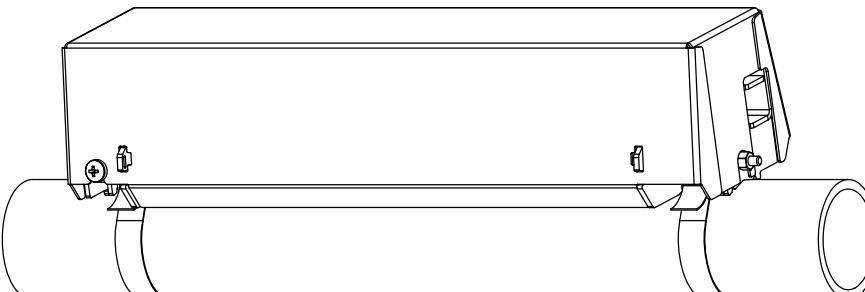
inner pipe diameter max. extended: in reflection arrangement (diagonal arrangement) and for a flow velocity of 12 m/s (25 m/s)

<sup>3</sup> test conditions: 3 months/2 bar (20 m)/20 °C

## Transducer mounting fixture

### Order code

1, 2	3	4	5	6	7...9	no. of character	
transducer mounting fixture	transducer	measurement arrangement	size	fixation	outer pipe diameter	option	description
VL	-						Variofix L
VC							Variofix C
	F						transducers with transducer frequency F
	K						transducers with transducer frequency G, H, K
	M						transducers with transducer frequency M, P
	Q						transducers with transducer frequency Q
	D						reflection arrangement or diagonal arrangement
	R						reflection arrangement
	S						small
	M						medium
	L						large
	B						bolts
	S						tension straps
	W						welding
	N						without fixation
		002					10...20 mm
		004					20...40 mm
		T36					40...360 mm
		013					10...130 mm
		036					130...360 mm
		092					360...920 mm
		200					920...2000 mm
			IP68				for transducers with degree of protection IP68
			OS				housing with stainless steel 316
			Z				special design

<b>Variofix L (VLK, VLM, VLQ)</b> 	material: stainless steel 304 (1.4301), 301 (1.4310), 410 (1.4006) option OS: 316Ti (1.4571), 316L (1.4404), 17-7PH (1.4568) inner length: <b>VLK:</b> 348 mm, option IP68: 368 mm <b>VLM:</b> 234 mm <b>VLQ:</b> 176 mm dimensions: <b>VLK:</b> 423 x 90 x 93 mm option IP68: 443 x 94 x 105 mm <b>VLM:</b> 309 x 57 x 63 mm <b>VLQ:</b> 247 x 43 x 47 mm
<b>Variofix L with bolt mounting plates (VL*--B)</b> 	material: stainless steel 304 (1.4301), 301 (1.4310), 410 (1.4006) option OS: 316Ti (1.4571), 316L (1.4404), 17-7PH (1.4568) inner length: <b>VLM:</b> 234 mm <b>VLQ:</b> 176 mm dimensions: <b>VLM:</b> 309 x 57 x 63 mm <b>VLQ:</b> 247 x 43 x 47 mm outer pipe diameter: max. 48 mm
<b>Variofix C (VC)</b> 	material: stainless steel 316Ti (1.4571) inner length: <b>VCF-*L, VCK-*L:</b> 500 mm <b>VCF-*S, VCK-*S:</b> 350 mm <b>VCM:</b> 400 mm <b>VCQ:</b> 250 mm dimensions: <b>VCF-*L, VCK-*L:</b> 560 x 126 x 125 mm <b>VCF-*S, VCK-*S:</b> 410 x 126 x 125 mm <b>VCM:</b> 460 x 96 x 82 mm <b>VCQ:</b> 310 x 85 x 71 mm

## Coupling materials for transducers

	normal temperature range (4th character of transducer order code = N)		extended temperature range (4th character of transducer order code = E)		
	< 100 °C	< 170 °C	< 150 °C	< 200 °C	200...240 °C
< 24 h	coupling compound type N or coupling foil type VT	coupling compound type E or coupling foil type VT	coupling compound type E or H or coupling foil type VT	coupling compound type E or H or coupling foil type VT	coupling foil type TF
long time measurement	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type VT	coupling foil type TF


type VT: fluid temperature 200 °C: min. 2 years

## Technical data

type	ambient temperature °C
coupling compound type N	-30...+130
coupling compound type E	-30...+200
coupling compound type H	-30...+250
coupling foil type VT	-10...+200
coupling foil type TF	200...240

## Damping material (optional)

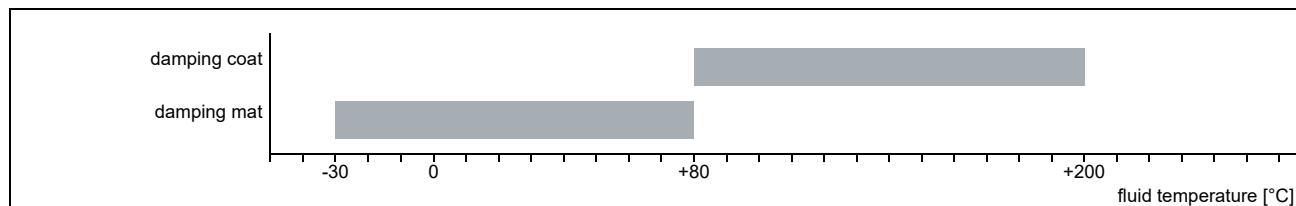Damping material will be used for the gas measurement to reduce acoustic noise influences on the measurement.




### Damping mats

#### transducer damping mat

Transducer damping mats will be installed below the transducers.

#### pipe damping mat

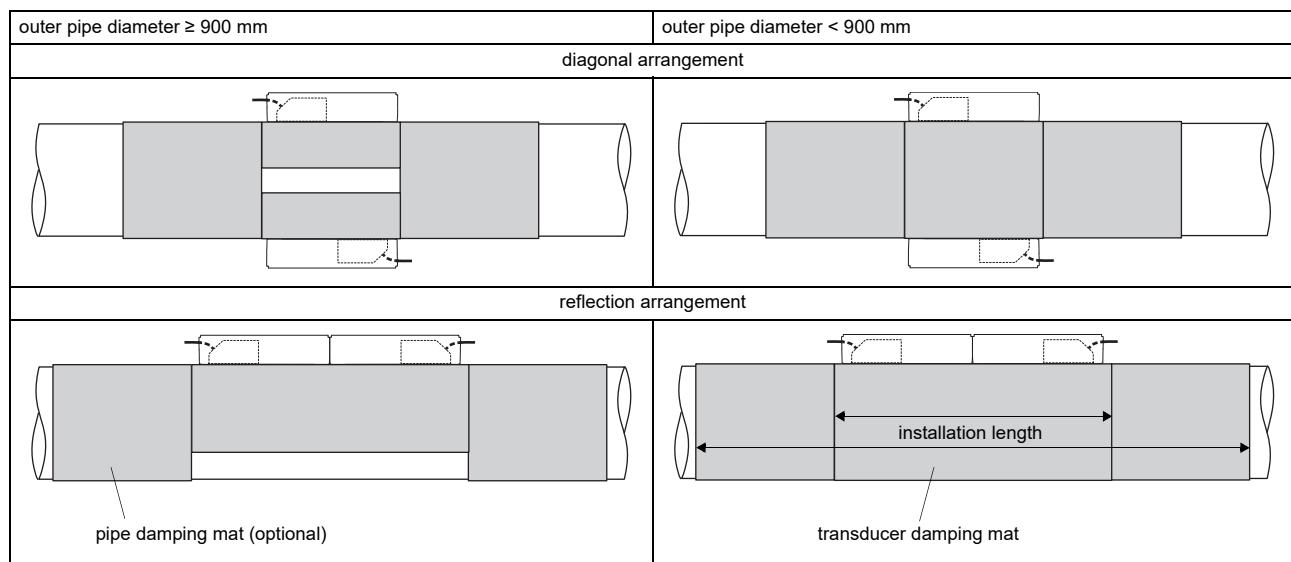Pipe damping mats will be installed if the sound propagation is disturbed at reflection points (e.g. flange, weld). Depending on the noise, the pipe damping mats will be installed at one or both sides of the transducer damping mat. If the local conditions are unknown, pipe damping mats should be installed.



### Technical data

type	E30R4	E30R3
order code	ACC-PE-GNNN-/DPD2	ACC-PE-GNNN-/DPD1
width	225	50
thickness	0.7	
length (per roll)	10	
weight	kg/m <sup>2</sup>	1.015
ambient temperature	°C	-30...+80
properties		self-adhesive

## Dimensioning

transducer		damping mat							
transducer mount-ing fixture	order code	type	number of layers	transducer damping mat			transducer damping mat + 2x pipe damping mat		
				max. installa-tion length [mm]	number of rolls <sup>1</sup>		max. installa-tion length [mm]	number of rolls <sup>1</sup>	
<b>VarioFix L</b>									
VLK	GLG	E30R4	3	890	4	4	1830	9	12
	GSG		3		4	4		9	10
	GLH		2		2	3		4	7
	GLK		1		1	1		2	2
	GSK		1		1	1		2	2
VLK-**-****/IP68	GLG	E30R4	3	930	5	5	1910	10	13
	GSG		3		5	5		10	11
	GLH		2		2	3		5	7
	GLK		1		1	1		2	2
	GSK		1		1	1		2	2
VLM	GLM	E30R3	1	660	1	1	1360	2	2
	GSM		1		1	1		2	2
	GLP		1		1	1		1	1
	GSP		1		1	1		1	1
VLQ	GLQ	E30R3	1	540	1	1	1120	1	1
	GSQ		1		1	1		1	1
<b>Variofix C</b>									
VCF-*L-****/IP68	GLF	E30R4	3	1160	6	6	2360	13	15
VCK-*L-****/IP68	GLG	E30R4	3		6	6		11	14
	GSG		3		6	6		11	12
	GLH		2		3	4		5	8
	GLK		1		1	1		2	2
	GSK		1		1	1		2	2
VCF-*S-****/IP68	GLF	E30R4	3	860	4	4	1760	9	10
VCK-*S-****/IP68	GLG	E30R4	3		4	4		7	9
	GSG		3		4	4		7	8
	GLH		2		2	3		4	5
	GLK		1		1	1		1	1
	GSK		1		1	1		1	1
VCM	GLM	E30R3	1	960	2	2	1960	3	3
	GSM		1		2	2		3	3
	GLP		1		1	1		1	1
	GSP		1		1	1		1	1
VCQ	GLQ	E30R3	1	660	1	1	1360	1	1
	GSQ		1		1	1		1	1

<sup>1</sup> calculation on the base of:

max. installation length (installation of one transducer mounting fixture per transducer in reflection arrangement) and  
max. recommended pipe diameter (standard) or max. extended pipe diameter (extended)

<sup>2</sup> calculation of the number of rolls when both transducers are mounted in one transducer mounting fixture (reflection arrangement) or in diagonal arrangement: number of rolls/2 and round up to the nearest integer

## Damping coat

For high temperatures it is recommended to apply the damping coat onto the pipe.

## Technical data

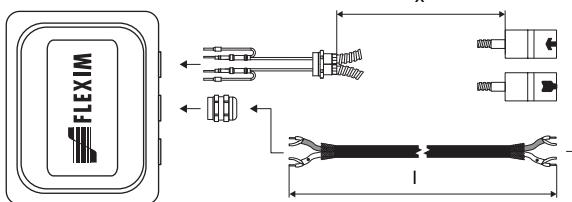

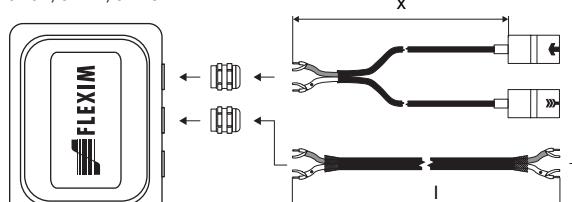

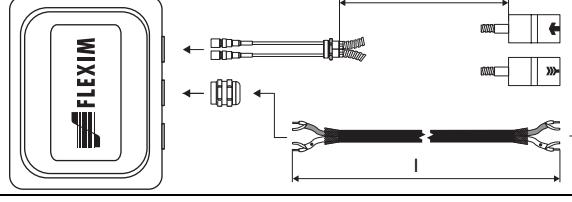

order code	ACC-PE-GNNN-/DPL1
material	multipolymeric matrix/inorganic ceramic coating
packing drum	I 1
properties	heat resistant, inert

Observe installation instructions (TI\_DampingCoat).

## Dimensioning

transducer frequency	number of packing drums		
	outer pipe diameter		
	≤300	≤500	≤700
F	3	4	5
G	2	3	4
H	2	2	3
K	2	2	-
M	2	-	-
P	1	-	-
Q	1	-	-

## Connection systems

connection system TS			transducers technical type
connection with extension cable	direct connection		
JB01	 <p>JB01</p> <p>X</p> <p>l</p> <p>transmitter</p>	 <p>transmitter</p> <p>X</p>	****8*
JB01, JBP2, JBP3	 <p>JB01, JBP2, JBP3</p> <p>X</p> <p>l</p> <p>transmitter</p>	 <p>transmitter</p> <p>X</p>	***L1*
JB02, JB03, JB04	 <p>JB02, JB03, JB04</p> <p>X</p> <p>l</p> <p>transmitter</p>	 <p>transmitter</p> <p>X</p>	****52

**Cable**

<b>transducer cable</b>			
<b>type</b>	<b>1699</b>	<b>2550</b>	<b>6111</b>
weight	kg/m	0.094	0.035
ambient temperature	°C	-55...+200	-40...+100
properties			longitudinal watertight
<b>cable jacket</b>			
material	PTFE	PUR	PFA
outer diameter	mm	2.9	5.2 ±0.2
thickness	mm	0.3	0.9
colour		brown	grey
shield		x	x
<b>sheath</b>			
material		stainless steel 304 (1.4301) option OS: 316Ti (1.4571)	-
outer diameter	mm	8	8

<b>extension cable</b>			
<b>type</b>	<b>2615</b>	<b>5245</b>	
order code	ACC-PE- GN NN-/EXXXXX	ACC-PE- GN NN-/EXA1XXX	
weight	kg/m	0.18	0.38
ambient temperature	°C	-30...+70	-30...+70
properties		halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2	halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2
<b>cable jacket</b>			
material	PUR	PUR	
outer diameter	mm	max. 12	max. 12
thickness	mm	2	2
colour		black	black
shield		x	x
<b>sheath</b>			
material	-	steel wire braid with copolymer sheath	
outer diameter	mm	-	max. 15.5

XXX - cable length in m

**Cable length**

<b>transducer frequency</b>	<b>F, G, H, K</b>		<b>M, P</b>		<b>Q</b>		<b>S</b>	
<b>connection system TS</b>								
<b>transducers technical type</b>	x		x		x		x	
*(DR)***8*	m	5	≤ 300	4	≤ 300	3	≤ 90	-
option LC:	m	9	≤ 300	9	≤ 300	9	≤ 90	-
*(LT)***8*	m	5	≤ 300	4	≤ 300	3	≤ 90	2
*(DR)***5*	m	5	≤ 300	4	≤ 300	3	≤ 90	≤ 40
option LC:	m	9	≤ 300	9	≤ 300	9	≤ 90	-
*(LT)***5*	m	12	≤ 300	12	≤ 300	-	-	-
option IP68: **** I*	m	12	≤ 300	12	≤ 300	-	-	-

x - transducer cable length

| - max. length of extension cable (depending on the application)

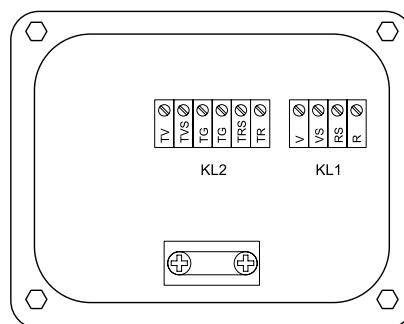
## Junction box

### Technical data

#### JB01S4E3M, JBP2, JBP3

weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
<b>material</b>		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
<b>ambient temperature</b>		
min.	°C	-40
max.	°C	+80
<b>explosion protection</b>		
• ATEX/IECEx (zone 1)		
junction box		JB01S4E3M
marking		CE 0637 II2G II2D Ex eb mb IIC T6...T4 Gb Ex tb IIIC T100 °C Db Ta -40...+70/80 °C
certification ATEX		IIBExU06ATEX1161
certification IECEx		IECEx IBE 08.0006
type of protection		gas: increased safety decoupled network: encapsulation dust: protection by enclosure
• ATEX (zone 2)		
junction box		JPB2
marking		CE Ex II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIIC T 100 °C Dc Ta -40...+(70)80 °C

#### Connection



#### Transducers

terminal strip	terminal	connection	transducer
KL1	V	signal	↑
	VS	internal shield	
	RS	internal shield	↗
	R	signal	

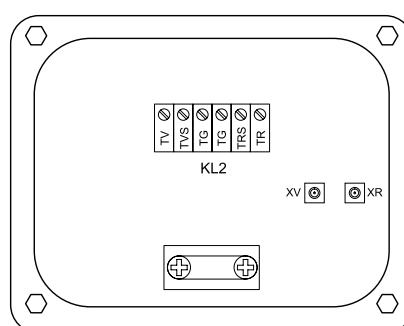
#### Extension cable

terminal strip	terminal	connection
KL2	TV	signal
	TVS	internal shield
	TRS	internal shield
	TR	signal

#### JB02, JB03, JB04

weight	kg	1.2 kg
fixation		wall mounting optional: 2" pipe mounting
<b>material</b>		
housing		stainless steel 316L (1.4404)
gasket		silicone
degree of protection		IP67
<b>ambient temperature</b>		
min.	°C	-40
max.	°C	+80
<b>explosion protection</b>		
• ATEX		
junction box		JB02
marking		CE Ex II3G Ex nA IIC (T6)...T4 Gc II3D Ex tc IIIC T 100 °C Dc Ta -40...+(70)80 °C

#### Connection




#### Transducers

terminal	connection	transducer
XV	SMB connector	↑
XR	SMB connector	↗


#### Extension cable

terminal strip	terminal	connection
KL2	TV	signal
	TVS	internal shield
	TRS	internal shield
	TR	signal
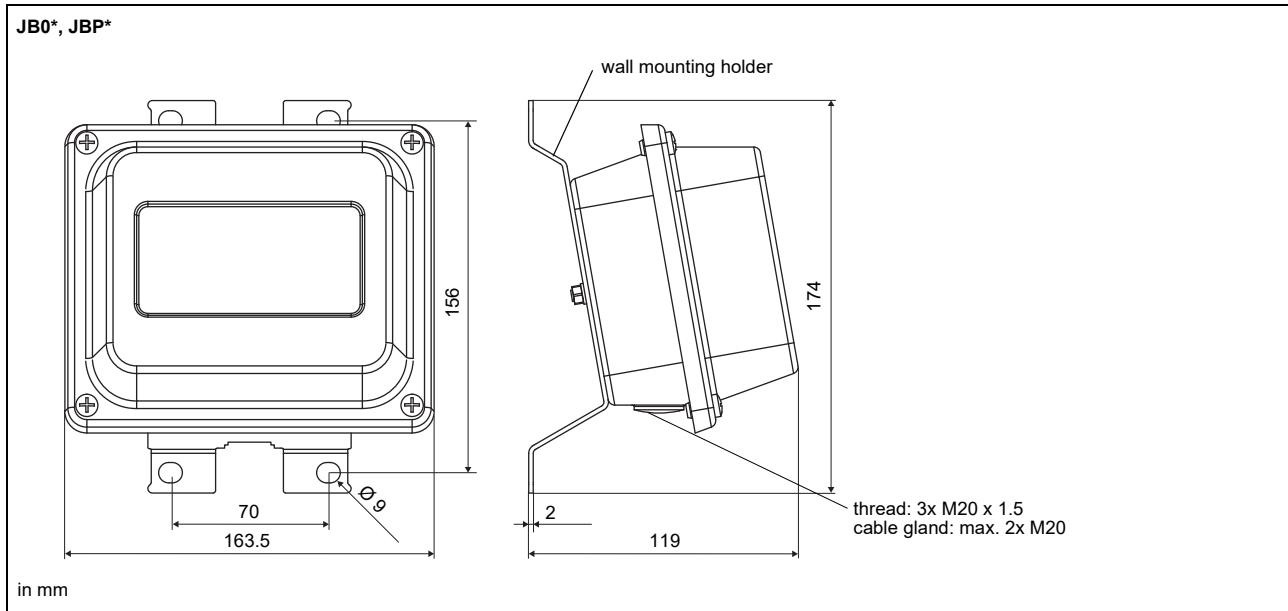
## Dimensions





## 2" pipe mounting kit

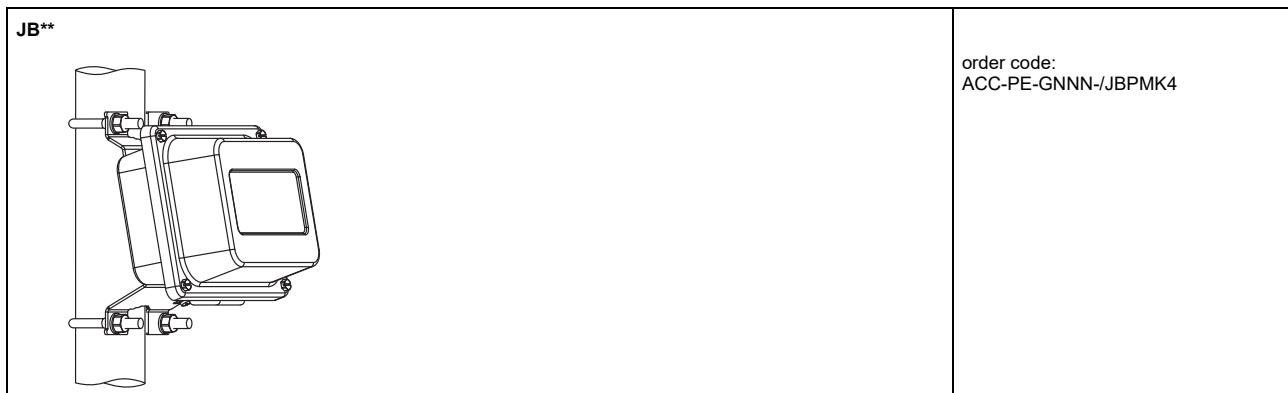


## Clamp-on temperature probe (optional)

### Technical data

PT12N						
design	clamp-on with connector					
type	Pt100					
connection	4-wire					
measuring range °C	-30...+250					
accuracy T	$\pm(0.15^\circ\text{C} + 2 \cdot 10^{-3} \cdot  T [^\circ\text{C}] )$ class A					
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ( $3 \text{ K} < \Delta T < 6 \text{ K}$ ), more corresponding to EN 1434-1					
response time s	50 ( $t_{50}, T_1 = 25^\circ\text{C}, T_2 = 60^\circ\text{C}$ )					
housing	aluminum					
degree of protection	IP54					
dimensions						
length l mm	20					
width b mm	15					
height h mm	13					
dimensional drawing						
weight kg	0.25 (without connector)					
accessories						
thermal conductivity paste 200 °C	x					
thermal conductivity foil 250 °C	x					
PT12N						
design	clamp-on					
type	Pt100					
connection	4-wire					
measuring range °C	-30...+250					
accuracy T	$\pm(0.15^\circ\text{C} + 2 \cdot 10^{-3} \cdot  T [^\circ\text{C}] )$ class A					
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)	$\leq 0.1 \text{ K}$ ( $3 \text{ K} < \Delta T < 6 \text{ K}$ ), more corresponding to EN 1434-1					
response time s	50 ( $t_{50}, T_1 = 25^\circ\text{C}, T_2 = 60^\circ\text{C}$ )					
housing	aluminum					
degree of protection	IP54					
dimensions						
length l mm	20					
width b mm	15					
height h mm	13					
dimensional drawing						
weight kg	0.25					
accessories						
thermal conductivity paste 200 °C	x					
Connection system						
direct connection/connection with extension cable						
Connection						
	temperature probe	extension cable	connector			
			pin			
	red	grey	2			
	red/blue	red	6			
	white/blue	blue	1			
	white	white	7			
Cable						
	temperature probe	extension cable				
type	4 x 0.22 mm <sup>2</sup>	LIYCY 8 x 0.14 mm <sup>2</sup>				
standard length m	3	5/10/25				
max. length m	-	200				
ambient temperature °C	-90...+200	-25...+80				
min. bend radius mm	27	68				
cable jacket						
material	PFA	PVC				
outer diameter mm	3.8 ±0.15	4.8 ±2				
colour	black	grey				
Connection system						
connection with extension cable		direct connection				
Connection						
	temperature probe					
	red					
	red/blue					
	white/blue					
	white					
Cable						
	temperature probe	extension cable				
type	4 x 0.22 mm <sup>2</sup>	LIYCY 8 x 0.14 mm <sup>2</sup>				
max. length m	-	200				
ambient temperature °C	-90...+200	-25...+80				
min. bend radius mm	27	68				
cable jacket						
material	PFA	PVC				
outer diameter mm	3.8 ±0.15	4.8 ±2				
colour	black	grey				

<b>PT12N</b>				
design		clamp-on ATEX		
type		Pt100		
connection		4-wire		
measuring range °C		-30...+250		
accuracy T		$\pm(0.15^\circ\text{C} + 2 \cdot 10^{-3} \cdot  T ^\circ\text{C})$ class A		
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)		$\leq 0.1\text{ K}$ ( $3\text{ K} < \Delta T < 6\text{ K}$ ), more corresponding to EN 1434-1		
response time s		50		
housing		aluminum		
degree of protection		IP67		
dimensions				
length l	mm	20		
width b	mm	15		
height h	mm	13		
dimensional drawing				
weight	kg	0.25		
accessories				
thermal conductivity foil 250 °C		x		
explosion protection				
• ATEX				
marking				
<b>PT12F</b>				
design		clamp-on short response time, with connector		
type		Pt100		
connection		4-wire		
measuring range °C		-50...+250		
accuracy T		$\pm(0.15^\circ\text{C} + 2 \cdot 10^{-3} \cdot  T ^\circ\text{C})$ class A		
accuracy $\Delta T$ (2x Pt matched according to EN 1434-1)		$\leq 0.1\text{ K}$ ( $3\text{ K} < \Delta T < 6\text{ K}$ ), more corresponding to EN 1434-1		
response time s		8 (t50, T1 = 25 °C, T2 = 60 °C)		
housing		PEEK, stainless steel 304 (1.4301), copper		
degree of protection		IP54		
dimensions				
length l	mm	14		
width b	mm	30		
height h	mm	27		
dimensional drawing				
weight	kg	0.32 (without connector)		
accessories				
thermal conductivity paste 200 °C		x		
thermal conductivity foil 250 °C		x		
plastic protection plate, insulation foam		x		

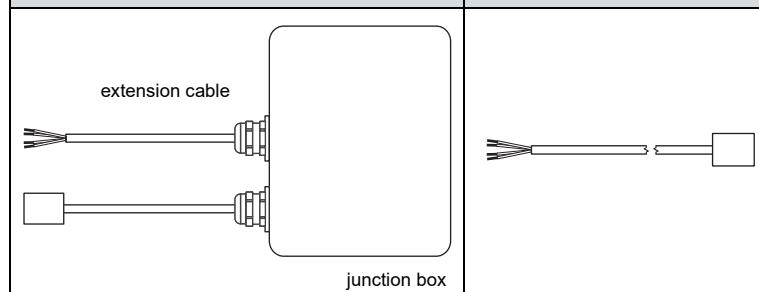**Connection system****connection with extension cable**

junction box

**Connection**


	temperature probe
	red
	red/blue
	white
	white/blue

**Cable**





	temperature probe	extension cable	extension cable
type		4 x 0.25 mm <sup>2</sup>	LIYCY 8 x 0.14 mm <sup>2</sup>
standard length m	3		5/10/25
max. length m	-		200
ambient temperature °C			-25...+80
min. bend radius mm			68
<b>cable jacket</b>			
material	PTFE	PVC	
outer diameter mm		4.8 ±2	
colour	black	grey	

**Connection**



	temperature probe	extension cable	connector
			pin
	red	grey	2
	red/blue	red	6
	white/blue	blue	1
	white	white	7

**Cable**

	temperature probe	extension cable
type		4 x 0.22 mm <sup>2</sup>
standard length m	3	LIYCY 8 x 0.14 mm <sup>2</sup>
max. length m	-	5/10/25
ambient temperature °C	-90...+200	200
min. bend radius mm	27	-25...+80
<b>cable jacket</b>		
material	PFA	PVC
outer diameter mm	3.8 ±0.15	4.8 ±2
colour	black	grey
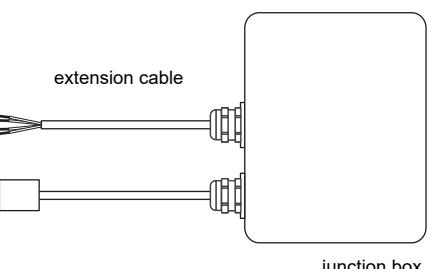
<b>PT12F</b>		
type	Pt100	
connection	4-wire	
measuring range	°C	-50...+250
accuracy T		±(0.15 °C + 2 · 10 <sup>-3</sup> ·  T [°C] ) class A
response time	s	8 (t50, T1 = 25 °C, T2 = 60 °C)
housing		PEEK, stainless steel 304 (1.4301), copper
degree of protection		IP54
<b>dimensions</b>		
length l	mm	14
width b	mm	30
height h	mm	27
dimensional drawing		
weight	kg	0.32
<b>accessories</b>		
thermal conductivity paste 200 °C	x	
thermal conductivity foil 250 °C	x	
plastic protection plate, insulation foam	x	
<b>Connection system</b>		
<b>connection with extension cable</b>		<b>direct connection</b>
		
<b>Connection</b>		
<b>temperature probe</b>		
		
<b>Cable</b>		
<b>temperature probe</b>		<b>extension cable</b>
type	4 x 0.22 mm <sup>2</sup>	LIYCY 8 x 0.14 mm <sup>2</sup>
standard length	m	3
max. length	m	-
ambient temperature	°C	-90...+200
min. bend radius	mm	27
<b>cable jacket</b>		
material	PFA	PVC
outer diameter	mm	3.8 ±0.15
colour		black grey

## Fixation
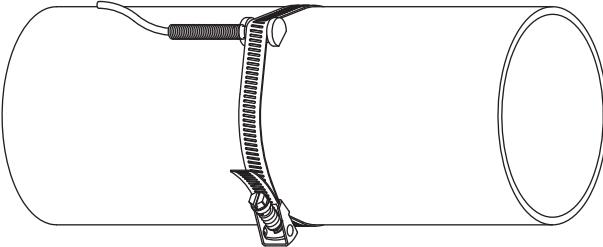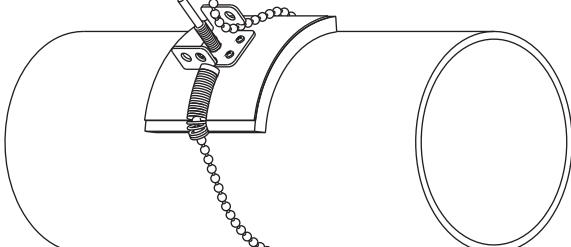
<b>tension strap PT12N</b>		material: stainless steel 301 (1.4310), 410 (1.4006) thermal insulation necessary
<b>ball chain PT12F</b>		material: stainless steel 316L (1.4404) length: 1 m

## Junction box

## Dimensions

**JBT\***

in mm

wall mounting holder

156

163.5

Φ 9


174

119

2

thread: 3x M20 x 1.5  
cable gland: max. 2x M12

**2" pipe mounting kit**

<b>JB**</b> 	order code: ACC-PE-GNNN-/JBPMK4
---	------------------------------------