


SWEP All-Stainless™ QA80 & QB80

SWEP All-Stainless™ products are developed for systems demanding 100% stainless steel components, and for high temperature applications. They can be used with fluids that are corrosive to copper or for sensitive applications where copper and nickel contamination must be avoided. SWEP's unique process technology enables a compact product with minimal material usage relative to its mechanical strength.

The QA80 and QB80 evaporator is optimized for heat pump systems using refrigerants. The injection system is fully integrated with the evaporator, thereby eliminating any additional assembly operations. The evaporators can be used with all commercially available system components and uses the most modern and efficient design on the market. It is available in a wide number of plate sizes.



Connections*

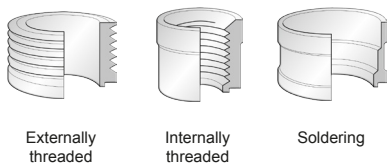

*For specific dimensions, or information about other types of connections, please contact your SWEP sales representative.

Pressure classes


M Medium, evaluated per EN 13345.

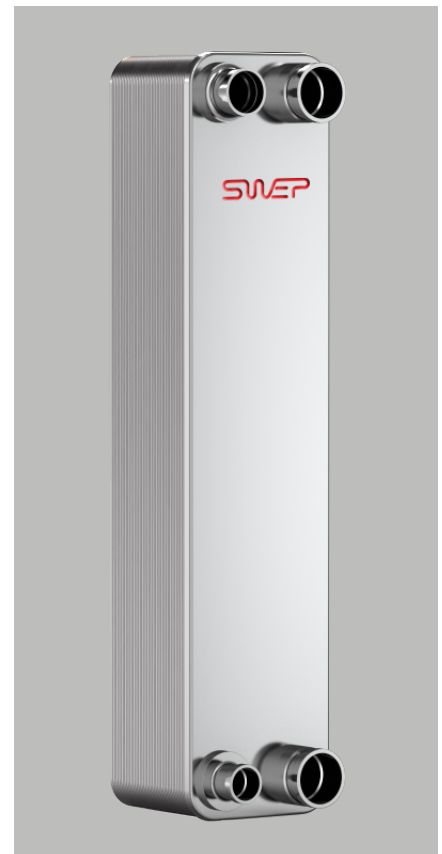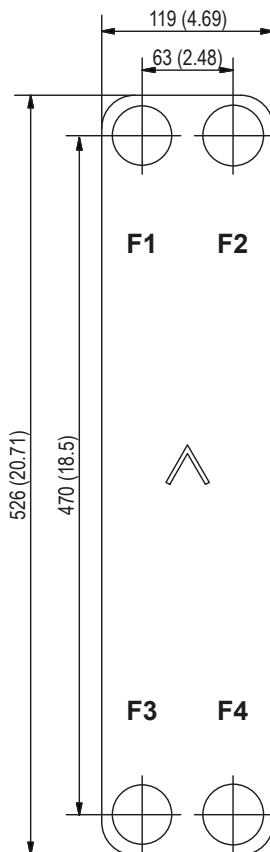

Max number of plates (NoP)	80
Port size F1/P1	33 mm (1.3 in)
Port size F2/P2	33 mm (1.3 in)
Port size F3/P3	33 mm (1.3 in)
Port size F4/P4	33 mm (1.3 in)
Max volume flow	17 m³/h (74.8 gpm)
Channel volume (SI)	0,107 dm³
Channel volume (US)	0.00378 ft³

Materials	Channel plate	Brazing
SPS	Stainless steel	Stainless steel

Size	Height of plate pack	Total weight
SPS M	4+(2,24×NoP) mm	2,1+(0,17×NoP) kg
	0.157+(0.088×NoP) in	4.64+(0.375×NoP) lb

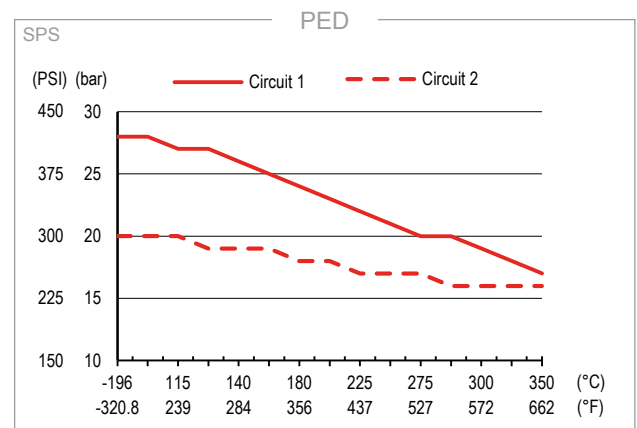

avroara-arm.ru
+7 (495) 956-62-18

SWEP
A DOVER COMPANY

SWEP All-Stainless™ QA80 & QB80

Third party approvals

SWEP BPHEs are generally approved by listed below certification organizations:

Europe, Pressure Equipment Directive (PED)


America, Underwriters Laboratories Inc (UL)

Japan, Kouatsu-Gas Hoan Kyoukai (KHK)

Additionally SWEP holds approvals from a vast variety of other certification organizations. For approval information regarding a specific product please contact your local SWEP representative. SWEP reserves the right to make changes without prior notice.

The BPHE concept

The Brazed Plate Heat Exchanger (BPHE) is constructed as a plate package of corrugated channel plates with a filler material between each plate. During the vacuum brazing process, the filler material forms a brazed joint at every contact point between the plates, creating complex channels. The BPHE allows media at different temperatures to come into close proximity, separated only by channel plates that enable heat from one media to be transferred to the other with very high efficiency. The concept is similar to other plate and frame technology, but without the gaskets and frame parts.

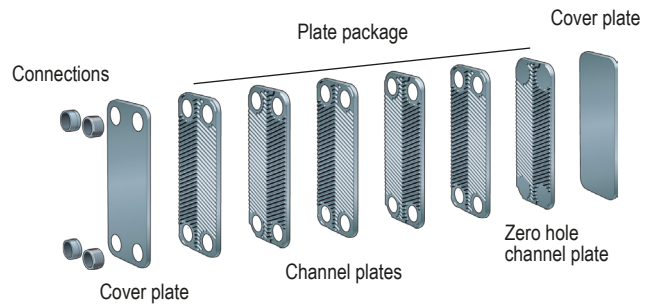

SSP calculation software

With SWEP's unique SSP, the SWEP Software Package, you can do advanced heat transfer calculations yourself, and choose the product solution that suits your application best. It's also easy to choose connections and generate drawings of the complete product. If you would like advice, or you would like to discuss different product solutions, SWEP offers all the service and support your need.

Material disclaimer

The information and recommendations in regards to the products are presented in good faith, however, SWEP makes no representations or warranties as to the completeness or accuracy of the information. Information is supplied upon the condition that the purchasers will make their own determination as to the products' suitability for their purposes prior to use. Purchasers should note that the properties of the products are both application and material selection dependent and that products containing stainless steel are still subject to corrosion if used in unsuitable environments.

avrorarm.ru
+7 (495) 956-62-18

SWEP
A DOVER COMPANY